

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

कमांक वीसीबी/लेखा/कय/2025-26/ 1612

दिनांक:- 19.3.2026

खुली प्रतियोगी बोली आमंत्रण सूचना सं0 22/2025-26


इस महाविद्यालय में (All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable

Gigabit NON-POE Switch and Online UPS 6 KVA) मोहरबंद दो कवर बिड (तकनीकी व वित्तीय बिड) विनिर्माताओं/प्राधिकृत व्यवहारियों से निर्धारित अवधि तक आमंत्रित की जाती है।

क्र0सं0	आईटमस का विवरण	अनुमानित लागत	अनुमानित मात्रा	बोली प्रतिभूति राशि	बोली/निविदा शुल्क
1.	Supply And Installation All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA)	रु0 9.50 लाख	बिड डाटा शीट के अनुसार	रु0 19000/-	रु0 400/-
स्टेट पोर्टल की वेबसाईट http://sppp.raj.nic.in एवं विभाग की वेबसाईट www.rajivas.org के माध्यम से बोली प्रपत्र व शर्तें डाउनलोड करने की प्रारम्भ/अन्तिम तिथि व समय					20.03.2026 से 27.03.2026 को सुबह 11.00 बजे तक
निविदा (तकनीकी व वित्तीय बिड), बोली प्रतिभूति राशि, बोली/निविदा शुल्क एवं निविदा में चाहे गये कागजात प्रस्तुत करने की अन्तिम दिनांक व समय (अधिष्ठाता, पशु चिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर के कार्यालय में जमा करवानी होगी)					27.03.2026 को सुबह 11.30 बजे तक
तकनीकी बोली खुलने की दिनांक व समय					27.03.2026 को दोपहर 3.30 बजे

इच्छुक बोलीदाता द्वारा उक्त विवरणानुसार डाउनलोड कर निविदा प्रस्तुत कर सकते हैं। दिनांक 27.03.2026 को सुबह 11.30 बजे तक निविदा (तकनीकी व वित्तीय बिड), बोली प्रतिभूति राशि, बोली/निविदा शुल्क का डी.डी./बैंकर चैक/नगद की रसीद इत्यादि जो कि अधिष्ठाता, पशु चिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर के नाम से इस कार्यालय को प्राप्त होनी चाहिये। निविदा आमंत्रण सूचना व अन्य विवरण स्टेट पोर्टल की वेबसाईट <http://sppp.raj.nic.in>, एवं विभाग की वेबसाईट www.rajivas.org पर उपलब्ध है।

अधोस्ताक्षरकर्ता को बोली प्रक्रिया को या उसके किसी भाग को निरस्त/रद्द करने का अधिकार होगा। तकनीकी बोली खोलने की तिथि को अवकाश हो जाने की स्थिति में अगले कार्य दिवस को खोली जावेगी। निविदादाता की तकनीकी बिड (प्रि-क्वालीफिकेशन) में सफल माने जावेगे, उन्ही की वित्तीय बिड खोली जावेगी। तकनीकी बिड (प्रि-क्वालीफिकेशन) योग्य नहीं पाये जाने वाले निविदादाता की वित्तीय बिड नहीं खोली जावेगी। बोली से संबंध में सम्पूर्ण अधिकार अधोहस्ताक्षरकर्ता के अन्तर्गत सुरक्षित रहेगा।


अधिष्ठाता

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

तकनीकिबिड

खुली प्रतियोगी बोली आमंत्रण सूचना सं० 22/2025-26

Supply And Installation All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA हेतु खुली प्रतियोगी बोली आमंत्रण सूचना सं० 22/2025-26 की तकनीकी बिड

विवरण:

1.	निविदा भरने का प्रकार	ऑफलाईन
2.	निविदा प्रस्तुत करने वाली फर्म /संस्था का नाम, पता, दूरभाष/मोबाईल न. व ई-मेल पता	
3.	निविदा शुल्क रू० 400/-रसीद सं०/डी०डी०/बैंकर चैक न० , दिनांक	रसीद सं०/डी.डी./बैंकर चैक न..... .दिनांक.....
4.	अनुमानित लागत	रू० 9.50लाख
5.	बोली प्रतिभूति राशि रू० 19000/-	रसीद सं०/डी.डी. /बैंकरचैक न.....दिनांक.....
6.	स्टेटपोर्टल व विभागीय वेबसाईट के माध्यम से बोली प्रपत्र व शर्तें डाउनलोड करने की दिनांक व समय	20.03.2026 से 27.03.2026 को सुबह 11.30 बजेतक
7.	निविदा (तकनीकी एवं वित्तीय) प्रस्तुत करने की अन्तिम दिनांक व समय	29 7.03.2026कोसुबह 11.30 बजेतक
8.	तकनीकी निविदा खोलने की दिनांक/समय	27.03.2026को दोपहर 3.30 बजे
9.	निविदा डाउनलोड करने की साईट	www.sppp.nic.in , www.rajuvas.ac.in
10.	आयकर पैन न. की प्रति	आयकर पैन न. की छाया प्रति तकनीकी निविदा के साथ प्रस्तुत करे ।
11.	जी.एस.टी. मेंपंजीकृत होने का रजिस्ट्रेशन प्रमाण पत्र की छायाप्रति	जी.एस.टी. मेंपंजीकृतहोने का प्रमाण पत्र की छाया प्रति तकनीकी निविदा के साथ प्रस्तुत करे ।

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

12.	जीएसटी चालान/जीएसटी रिटर्न की छाया प्रति	जीएसटी चालान/जीएसटी रिटर्न की छायाप्रति तकनीकी निविदा के साथ प्रस्तुत करे ।													
13	मूल निर्माता द्वारा निविदा प्रस्तुत करने पर निर्माता का प्रमाण पत्र /अधिकृत विक्रेता द्वारा निविदा प्रस्तुत करने पर निर्माता द्वारा जारी प्रमाण पत्र की छाया प्रति तकनीकी बिड के साथ प्रस्तुत करनी होगी।	मूल निर्माता द्वारा निविदा प्रस्तुत करने पर निर्माता का प्रमाण पत्र /अधिकृत विक्रेता द्वारा निविदा प्रस्तुत करने पर निर्माता द्वारा जारी प्रमाण पत्र की छाया प्रति तकनीकी बिड के साथ प्रस्तुत करे।													
14	जिस मेक की दर कोट की जायेगी उस मेक का ISO Certificate की छाया प्रति तकनीकी बिड के साथ प्रस्तुत करनी होगी।	ISO Certificate की छाया प्रति तकनीकी बिड के साथ प्रस्तुत करें।													
15.	फर्म पूर्व में कभी ब्लैक लिस्टेड घोषित नहीं की गई है एवं फर्म के विरुद्ध पूर्व में कभी पुलिस कार्यवाही नहीं की गई है, न ही माननीय न्यायालय द्वारा कभी दंडित किया गया है और न ही किसी प्रकार की कोई विजिलेंस जॉच लंबित है इस बाबत सौ रूपये कि स्टाम्प पर शपथ-पत्र नोटरी करवा के प्रस्तुत करे।	इस बाबत सौ रूपये कि स्टाम्प पर शपथ-पत्र प्रस्तुत करे ।													
16.	निविदा की वैधता अवधि	up to Three Month													
17	निविदा की शर्तें व सामान्य निविदा शर्तें जिन पर निविदादाता के प्रत्येक पृष्ठ पर हस्ताक्षर हो,Annexure A,B,C,D , SR-11 and Bid Securing Declaration Form	प्रत्येक पृष्ठ पर हस्ताक्षर कर प्रस्तुत करे ।													
18	S.No.	आईटमस का विवरण	Required Appro. Qty												
	I.	All in One PC	Make & Model												
		<table border="1"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Form Factor</td> <td>All in one</td> </tr> <tr> <td>Chassis</td> <td>PC & Monitor integrated in one Chassis</td> </tr> <tr> <td>Chipset</td> <td>Commercial Class Intel® Q670 Chipset or higher</td> </tr> <tr> <td>Processor</td> <td>Intel® 13th Generation or higher</td> </tr> <tr> <td>Memory</td> <td>16 GB Memory expandability up to 64 GB</td> </tr> </tbody> </table>	Item	Specifications	Form Factor	All in one	Chassis	PC & Monitor integrated in one Chassis	Chipset	Commercial Class Intel® Q670 Chipset or higher	Processor	Intel® 13th Generation or higher	Memory	16 GB Memory expandability up to 64 GB	01
Item	Specifications														
Form Factor	All in one														
Chassis	PC & Monitor integrated in one Chassis														
Chipset	Commercial Class Intel® Q670 Chipset or higher														
Processor	Intel® 13th Generation or higher														
Memory	16 GB Memory expandability up to 64 GB														

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

	with 2 DIMM Slots		
Storage	1TB SSD		
Graphics	Intel® UHD Graphics		
Audio	Integrated audio controller with internal stereo speaker of atleast 2X2W		
Operating System	Microsoft Windows 11 Professional with OEM Recovery DVD or option of Cloud Recovery with Preinstalled MS office		
Networking	Integrated Intel® Ethernet Gigabit ethernet		
	Intel® Wi-Fi 6E AX211 802.11ax 2x2 with Bluetooth® M.2 Combo		
Ports	Video: 1 Display Port ,1 HDMI in, 1 HDMI out		
	USB:2 USB 3.2 Gen 1, 2 USB 3.2 Gen 2, 1 USB Type C 3.2 Gen 2		
Slots	2 M.2 PCIe for WLAN & Storage		
Bays	1 Internal Bay		
Keyboard	USB Wired Keyboard,		
Mouse	USB Optical Wired Mouse		
Power Supply	120-240 W power supply		
Volume	as per OEM		
Security	Hardware based endpoint security controller TPM 2.0 Integrated Intrusion Sensor Support for chassis cable lock devices Drive lock option for HDD to secure Data Integrated protection from malware that lurks on malicious websites Integrated real-time detection and prevention of zero-day threats and advanced persistent threat (APT) attacks for Windows applications		
Manageability	Out of band management independent of the power state and operating system state of PC Integrated utility to enables hardware level testing outside the operating system & Drivers should be available on OEM Website for download		
Certifications	Microsoft Windows 11 FCC, CE, RoHS, UL, EPEAT, Energy Star, TCO, MIL STD 810H ISO 9001,14001,20001,27001		
Display	23.8" IPS, antiglare with Minimum resolution of 1920x1080, 16:9 aspect ratio Integrated 5 MP webcam		
Warranty	3 Years onsite		

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

II. Interactive Smart Display

Display Panel Size	86 Inches or higher
Light Source	DLED backlight
Resolution	3840 × 2160 (4K UHD)
Refresh Rate	60Hz
Aspect Ratio	16:9 or better
Display Colour	1.07 Billion colors (10-bit) or higher
Surface	4mm Anti-glare tempered glass
Brightness	Upto 450 cd/m ² or better
Haze	25%
Contrast Ratio	1200:1 or better
Viewing Angle	178° (H/V)
Backlight Life	≥ 50,000 hours or better
Touch Technology	IR Touch
Touch Points	40 touch points on Android & Windows or better
Touch Response	≤ 5 ms or less
Touch Accuracy	± 2 mm or less
CPU	Octa-Core A55 or better
GPU	Quad-Core MaliG52 or better
RAM + ROM	8GB RAM + 128GB Storage or better
Operating System	Android 14.0
Wi-Fi	802.11 a/b/g/n/ac (2.4GHz/5GHz)
Bluetooth	5.0 or latest
Speakers	2 × 20 W or better
Interfaces	5× USB 3.0/USB 2.0, 1× Type-C, 1x TF Card Slot, 3x HDMI IN (1 ARC), 1x Touch USB, 1x RS232, 1x Line Out, 1x Coax, 1x RJ45 IN, 1x 3.5mm Jack, 1x VGA IN, 1x VGA Audio IN
Whiteboard Features	Multi-touch interactive whiteboard (upto 20 points), handwriting-to-text, AI shape recognition, math/science tools, sticky notes, text editing, real-time collaboration, export to PDF, YouTube & Google integration, browser panel, 3D model viewer, screen capture
Built in VC Software	The solution should support up to 100 participants in an online session, allow transmission of up to 4 camera feeds simultaneously, and provide 4K video, chat, data collaboration, and whiteboard features. It should also support local recording of sessions, have valid Web Security / Vulnerability & Penetration Testing Certificates, and the Interactive Display with VC software must be from the same OEM

01

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

		<table border="1"> <tr> <td data-bbox="343 197 534 526">Additional Features</td> <td data-bbox="534 197 1061 526">The system should include a scheduling option with VC link sharing, support multiple cameras (minimum 4) with voice-activated switching layout, and offer advanced bandwidth optimization. It must support webinars with Q&A via chat along with YouTube live integration, and provide a VC client for smartphones & iPads with secure video/data encryption.</td> </tr> <tr> <td data-bbox="343 526 534 593">Accessories</td> <td data-bbox="534 526 1061 593">Power Cord x1, Stylus Pen x2, Wall Mount Kit x1, Remote Control x1, User Manual x1</td> </tr> <tr> <td data-bbox="343 593 534 660">Certifications</td> <td data-bbox="534 593 1061 660">BIS, CE, FCC & RoHS</td> </tr> </table>	Additional Features	The system should include a scheduling option with VC link sharing, support multiple cameras (minimum 4) with voice-activated switching layout, and offer advanced bandwidth optimization. It must support webinars with Q&A via chat along with YouTube live integration, and provide a VC client for smartphones & iPads with secure video/data encryption.	Accessories	Power Cord x1, Stylus Pen x2, Wall Mount Kit x1, Remote Control x1, User Manual x1	Certifications	BIS, CE, FCC & RoHS																										
Additional Features	The system should include a scheduling option with VC link sharing, support multiple cameras (minimum 4) with voice-activated switching layout, and offer advanced bandwidth optimization. It must support webinars with Q&A via chat along with YouTube live integration, and provide a VC client for smartphones & iPads with secure video/data encryption.																																	
Accessories	Power Cord x1, Stylus Pen x2, Wall Mount Kit x1, Remote Control x1, User Manual x1																																	
Certifications	BIS, CE, FCC & RoHS																																	
III.	Interactive Podium	<table border="1"> <thead> <tr> <th data-bbox="343 694 534 806">Parameter</th> <th data-bbox="534 694 1061 806">Specifications</th> </tr> </thead> <tbody> <tr> <td data-bbox="343 806 534 862">Top Body</td> <td data-bbox="534 806 1061 862">Top and Body should be Metal.</td> </tr> <tr> <td data-bbox="343 862 534 918">Mechanism</td> <td data-bbox="534 862 1061 918">The system should have a Top Sliding Mechanism.</td> </tr> <tr> <td data-bbox="343 918 534 996">Keyboard/Mouse Tray</td> <td data-bbox="534 918 1061 996">It should have sliding Tray for Keyboard /Mouse</td> </tr> <tr> <td data-bbox="343 996 534 1064">Visualizer Tray</td> <td data-bbox="534 996 1061 1064">It should have a Provision for Visualizer with a Sliding Tray.</td> </tr> <tr> <td data-bbox="343 1064 534 1131">Wheels</td> <td data-bbox="534 1064 1061 1131">Its should have Wheels for easy movement.</td> </tr> <tr> <td data-bbox="343 1131 534 1220">Rack Space</td> <td data-bbox="534 1131 1061 1220">Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.</td> </tr> <tr> <td data-bbox="343 1220 534 1400">Screen Size</td> <td data-bbox="534 1220 1061 1400">The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office</td> </tr> <tr> <td data-bbox="343 1400 534 1444">Type</td> <td data-bbox="534 1400 1061 1444">The monitor should be LED backlight.</td> </tr> <tr> <td data-bbox="343 1444 534 1489">Resolution</td> <td data-bbox="534 1444 1061 1489">1080p</td> </tr> <tr> <td data-bbox="343 1489 534 1545">Port</td> <td data-bbox="534 1489 1061 1545">The monitor should come with a USB port for PC Connection.</td> </tr> <tr> <td data-bbox="343 1545 534 1612">Brightness</td> <td data-bbox="534 1545 1061 1612">The monitor should have a Luminosity of 350 cd/m² or more.</td> </tr> <tr> <td data-bbox="343 1612 534 1668">Input port</td> <td data-bbox="534 1612 1061 1668">The monitor should have a VGA, HDMI or DVI Input port.</td> </tr> <tr> <td data-bbox="343 1668 534 1736">Supply</td> <td data-bbox="534 1668 1061 1736">The monitor should support Power Supply of 100 ~ 250VAC.</td> </tr> <tr> <td data-bbox="343 1736 534 2110">Laptop Interface</td> <td data-bbox="534 1736 1061 2110"> The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1 It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more </td> </tr> </tbody> </table>	Parameter	Specifications	Top Body	Top and Body should be Metal.	Mechanism	The system should have a Top Sliding Mechanism.	Keyboard/Mouse Tray	It should have sliding Tray for Keyboard /Mouse	Visualizer Tray	It should have a Provision for Visualizer with a Sliding Tray.	Wheels	Its should have Wheels for easy movement.	Rack Space	Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.	Screen Size	The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office	Type	The monitor should be LED backlight.	Resolution	1080p	Port	The monitor should come with a USB port for PC Connection.	Brightness	The monitor should have a Luminosity of 350 cd/m ² or more.	Input port	The monitor should have a VGA, HDMI or DVI Input port.	Supply	The monitor should support Power Supply of 100 ~ 250VAC.	Laptop Interface	The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1 It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more	01	
Parameter	Specifications																																	
Top Body	Top and Body should be Metal.																																	
Mechanism	The system should have a Top Sliding Mechanism.																																	
Keyboard/Mouse Tray	It should have sliding Tray for Keyboard /Mouse																																	
Visualizer Tray	It should have a Provision for Visualizer with a Sliding Tray.																																	
Wheels	Its should have Wheels for easy movement.																																	
Rack Space	Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.																																	
Screen Size	The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office																																	
Type	The monitor should be LED backlight.																																	
Resolution	1080p																																	
Port	The monitor should come with a USB port for PC Connection.																																	
Brightness	The monitor should have a Luminosity of 350 cd/m ² or more.																																	
Input port	The monitor should have a VGA, HDMI or DVI Input port.																																	
Supply	The monitor should support Power Supply of 100 ~ 250VAC.																																	
Laptop Interface	The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1 It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more																																	

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

		<p>It shall have basic selection control buttons for the four inputs, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.</p>		
	Multimedia Controller	Available		
	Built-in DSP	100W, Frequency Range 30 Hz – 15,000 Hz Automatic Echo Cancellation, Automatic Gain Control, Dynamic Noise Reduction, Full Duplex Connectivity 1× Line Input, 1× Line Output, 1× USB Port		
	Built in devices	Central Control Panel-Available Gooseneck Mic-1 Wireless Mic-1 Handheld Mic-1 Wireless Receiver-1 Amplifier Wattage (Watt) 200		
	Gooseneck Mic Port	1x Microphone should come up with standard 3 PIN XLR Connector.		
	Speakers (1 Pair)	50 W Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90 Hz–20 kHz Frequency Response)		
	Certifications	It should have CE,FCC and RoHS		
IV.	<p>Layer 2 Manageable Gigabit NON-POE Switch</p> <p>Switch Specification</p> <p>Should Support at least 24 X 10/100/1000BASE-T Ports and 4 X SFP+ Ports.</p> <p>Should Support console port , RJ-45 port for out of band-management port for accessing the CLI of the switch and USB port for connecting a USB storage device.</p> <p>Should Support Switching capacity should be 128 Gbps or higher or non-blocking architecture.</p> <p>Should Support 64 Bytes packet forwarding rate should be 95.24 Mpps or higher</p> <p>Switch MAC table should be at least 16K or higher.</p> <p>Should Support standard 19-inch 1U rack mountable.</p> <p>Should Support MTBF 530,607 hours</p> <p>Should Support Physical Stacking up to 9 units per stack. Stacking bandwidth should be up to 80G and up to 32 devices per virtual stack.</p> <p>Should Support Operating temperature should be 0 to 50 °C. Storage Temperature - 20 to 70 °C</p> <p>Should Support EMI Certificates CE, FCC, UL, MTCTE (TEC-ER)</p> <p>OEM Should have Certificate for Industrial Cyber Security Capability (Like - IEC-62443-4-1:2018 or Equivalent Indian Certificate). OEM/Product must be on Trusted Telecom Portal of Department of Telecommunication,</p>		01	

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

Government of India.		
Switch Software Specification		
Should have 802.1D STP, 802.1w RSTP and 802.1s MSTP Spanning Tree Protocol and ERPS as per standard ITU-T G.8032 to provide protection for Ethernet traffic in ring topology.		
Should support BPDU Filter, BPDU restriction, Root restriction, Link Aggregation (Max. 32 groups per device, 8 ports per group)		
Should support Loopback detection (LBD) to detect the loop created by a specific port.		
Should support IGMP Snooping v1/V2/V3 & IGMP groups 1K or more IGMP groups and require support for IGMP Snooping Fast Leave.		
Should Support MLD Snooping v1/v2 & MLD group 1K or more and require support for MLD Snooping Querier.		
Should support 64 IP interfaces and IPv4/IPv6 Loopback interface.		
Should support IPv6 Neighbor Discovery (ND).		
Should support Static route for both IPv4 and IPv6, IPv4: 128 (64 static + 64 local), IPv6: 96 (32 static + 64 local), L3 Forwarding Table Entries 1K.		
Should support IEEE 802.1Q VLAN Port based, Voice VLAN, Private, Double (Q-In-Q), Multicast VLAN, 802.1v Protocol VLAN, VLAN Trunking, GVRP		
Should have per-port broadcast, multicast, and unicast storm control to prevents faulty end stations from degrading overall systems performance.		
Should support port security to secures the access port based on MAC address. Port Mirroring, RSPAN, L2 Tunneling, Flex Link.		
Should be support DoS attacks, Prevent TCP over MAC Multicast/Broadcast, Prevent TCP/UDP Port is Zero.		
Should support DHCP snooping and DHCP Server Screening traps, DHCP relay Option 60, 61, and 82, DHCP client DHCP auto-configuration.		
Should support 802.1X port based, Support EAP, TLS, TTLS and PEAP, MD5 authentication, Support VLAN based authentication for client roaming.		
Switch Should support RADIUS and TACACS+ authentication.		
Should support Authentication database failover, Compound authentication, Dynamic VLAN assignment, Identity Driven WAC policy assignment. Microsoft® NAP (IPv4) Guest VLAN.		
Should support QoS (quality of service) IEEE 802.1P for traffic prioritization. It should support 8 queues per port.		
Should support different type of QoS priority like Strict Priority Queue and Weighted Round Robin, Strict + WRR, Weighted Deficit Round Robin (WDRR) Deficit Round		

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

	Robin (DDR)		
	Should support Remark 802.1p priority, DSCP, Outer VID, ToS/IP preference.		
	Support at least 2K ingress & 1K egress access control entries. ACL based on MAC, IPv4 and IPv6, TCP/UDP port number, User-defined packet contentm, CPU Interface Filtering. Should support time-based ACL.		
	Able to manage trough Web-GUI, fully functional CLI interface and Telnet.		
	Should have multiple Image and configuration support to reduced down time for the switches.		
	Should support sFlow for monitoring traffic in data networks, SNMP v1, v2c, v3 and SNMP Traps and RMON, System log, 802.1AB LLDP, LLDP-MED.		
	Should have SNTP/NTP protocol for time synchronization. PD Alive, PPPoE circuit-ID tag insertion. Password encryption.		
	Should support Operations, Administration, and Management (OAM), 802.3ah Ethernet Link OAM, 802.1ag Connectivity Fault Management (CFM) Dying Gasp, Cable diagnostics.		
	OEM Should be international certification for the ISO 45001 Health and Safety Management System, Information Security Management System: ISO 27001, ISO 9001 Quality Management System, ISO 14001 Environmental Management System, and ISO 14064-1 Greenhouse Gas Inventory Standards.		
	Should be supplied with the all-necessary components like Two Power supply, Two Power cord, All Fan Module, Console Cable, Rack-mount kit, Installation Guide, etc. and necessary software image file to fulfil all above mention feature set from day 1. All Passive and Active should be same OEM.		
	Unshielded Twisted Pair Category 6 Cable		
	Features		
	Category 6 Unshielded Twisted 4 pair shall be compliant with ANSI/TIA/EIA-568-C.2 and ISO/IEC 11801 Class E.		
	Should support 1000BASE-T (1 Gigabit Ethernet) standard.		
	Category 6 should operate on bandwidth up to 250MHz as per standard.		
	Construction Characteristics		
	Conductor should be 23 AWG solid bare copper.		
	Conductor Insulation material should be HDPE.		
	Four twisted pairs separated by internal X shaped, full separator. Half shall not be accepted.		
	Sheath material should be FR-PVC as per IEC-60332-1.		
	Cable outer diameter should be 6.1 mm nominal.		
	Cable weight should be 13.6Kg/Box. UL Marking on Cable jacket is madnatory.		
	Electrical Properties		


f

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

Conductor Resistance: $\leq 9.38\Omega/100m$
Mutual Capacitance: $< 5.6nF/100m$
Resistance Unbalance: 5% Max
Delay Skew: $< 50nS$
Capacitance unbalance: 330pF/100m
NVP: 69%
Other Characteristics
Each meter printed with sequential Length Counter
Temperature Range -20° to $+70^{\circ}C$
Approval : UL Listed & ETL Verified
Cable Should be RoHS Compliant.
Note
OEM for the cable Box and all copper Accessories should be from same OEM. All Passive Should be from from same OEM.

Unshielded Twisted Pair Category 6 Loaded Patch Panel - 24 Port
Features
Category 6 24 port Patch Panel should be 24 Port 1U Size loaded with 24 port RJ-45 IO.
Mounts in standard 19 inch racks.
Patch panel should have cable manager for improvement management.
Patch panel suitable for Category 6 keystone.
Panel material should have SPCC and Black Color.
Rear support bar material should have SPCC and Black Color.
RJ-45 jack housing should be PBT + Glass fiber UL94V-0 and Contact brackets should be PBT + Glass fiber UL94V-0.
Rj-45 contact material should be phosphor bronze with nickel plated and plug contact area finish with 50 micro-inches Gold plated.
Contact resistance should be maximum 20 miliohm.
Operating Temperature should be -10° Celsius to 60° Celsius.
Life of RJ-45 Jack should be 750 cycles minimum @ 500 VDC.

Unshielded Twisted Pair Category 6 UTP Patch Cord - 1 Mtr
Features
Category 6 patch cords with four pair twisted cable terminated with RJ45 modular plugs at both the ends.
Patch Cord should have TIA/EIA 568C.2 standard.
Category 6 patch cord should be 100% factory made and performance tested.
Insulation Material:
UL Application - PC UL94-V-0
Category 6 patch cord length requires – 1/3 meter.
Color code for Patch Cord: Grey/Blue/Green
Cat6 Patch cord should be ETL Verified.



COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

	<p>Performance Characteristics</p> <p>Patch cord conductor should be 24 AWG, multi-strands.</p> <p>Patch cord conductor metal should be made from bare copper.</p> <p>Insulation material should be high density polyethylene, material used should be FRPVC</p> <p>Insertion cycle- 750 Times.</p> <p>Dielectric volatge- 1000V DC/Min <05A</p> <p>Insulation Resistance - >500M Ohm, 1000DC/Min</p> <p>Modular Connector/Plug Characteristics</p> <p>Patch cord plug should be gold plated.</p> <p>Patch cord should support heat resistance max 75 degree C</p> <p>Contact blade of plug should be made from copper alloy.</p> <p>Unshielded Twisted Pair Category 6 Jack / IO</p> <p>Features</p> <p>Category 6 keystone jacks are RJ45, 8 position 8 contact socket.</p> <p>Category 6 keystone jacks are suitable for 22-26 AWG stranded and solid wire.</p> <p>Category 6 keystone jacks are compatible with both 110 & Krone punch down tools.</p> <p>The Category 6 keystone jacks shall be backward compatible with Category 5e, 5 and 3 cords and cables.</p> <p>It compliance with ANSI/TIA/EIA 568 C.2 standard.</p> <p>The Category 6 keystone jacks shall be of a universal design supporting T568 A & B wiring.</p> <p>Color of Keystone Jack: White</p> <p>Mechanical Characteristics</p> <p>Category 6 keystone jacks housing made from PC, UL 94V-2 material.</p> <p>RJ45 Jack contact material should be phosphor bronze with nickel plated. Finished with 50 micro-inch gold plated on plug contact area.</p> <p>IDC Housing made from PC, UL 94V-2. Terminal material should be Phosphor bronze with tin plated.</p> <p>Should have IDC CAP and material of IDC Cap should be PC, UL 94V-2.</p> <p>Performance Characteristics</p> <p>Current rating should be 1.5A.</p> <p>Operating Temperature should be -10° Celsius to 60° Celsius.</p> <p>Life of Jack should be 750 cycles minimum (ISO/IEC 11801 / IEC 60603-7-4).</p> <p>Face Plate Single Port with Back Box</p> <p>Features</p> <p>Face plate should be single port with Back box.</p> <p>Face Plate should have shutter to protect from dust.</p> <p>It should have write on labels in transparent plastic window – supplied with plate</p>		
--	---	--	--

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

	Face plate material: ABS with white color		
	Screw should be supplied with face plate.		
	Note		
	OEM for the cable Box and all copper and fibre Accessories should be from same OEM.		
V.	Online UPS 6 KVA		
	UPS Rating & Architecture	6KVA Floor Mount UPS	
	Technology	True Online Double Conversion Technology (VFI-SS-111)	
	I/P Voltage Range	170V to 280 VAC based on load level	
	I/P Frequency	50 Hz +/-10%	
	I/P Power Factor	0.99	
	THD current	< 5%	
	O/P Voltage (Single Phase)	220/230/240V AC +/- 1%	
	O/P Frequency	50 Hz +/- 0.1 Hz	
	THD voltage	< 1 % for Linear Load; < 3 % for Non-Linear Load	
	Overload Rating @ unity Output Power Factor	105-110%- 60 mins, 111% to 125 % - 10mins ; 126% to 150 % - 1 min & > 150%- 0.5 sec	
	O/P waveform	Pure sinewave	
	O/P Power Factor	Unity (6 KVA=6 KW)	
	Overall Efficiency	>93% @ full linear load	
	Parallel Kit Cable	UPS should have Parallel kit (Inbuilt)	
	Inbuilt Static Bypass	Should be Available	
	Inbuilt Maintenance Bypass	Should be Available	
	LED Status Indication	Normal mode, Load on battery, Bypass mode, Warning	
	LCD Display Indication	Input & Output Voltage/ Frequency, Battery voltage, Load percentage, Fault codes, Overload, Short circuit, Low Battery	
	EPO	Should be Available	
	Audible Alarm	Battery-powered operation, Bypass input out of range, Operation in bypass mode, UPS fault (with error codes), Overload	
	Battery Bank details for 30 mins	26AH x 18 No's SMF Batteries	
	Communication Ports	RS232, USB	
	Operating Temperature	0 to 40 Deg C	
	Make in India	Yes	

A

A


me

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

UPS Model Certificates	CE, PEP, REACH and BIS (Capacity & Modelwise)		
UPS Test Report	Third Party NABL approved Test Lab report required (Should not be older than 5 Years)		
Approved UPS Make	Numeric (Legrand), Vertiv, APC (Schneider)		
Approved Battery Make	Exide, Quanta, Panasonic		
UPS & Batteries Accessories	MS Open Battery Rack, UPS to Batteries DC Cable and Interlinks		
After Sales Support	UPS OEM should have own service center in Bikaner (No third party)		


नोट:- तकनीकी निविदा में मेक और मॉडल अंकित करना आवश्यक है अन्यथा तकनीकी निविदा में असफल घोषित कर दिया जायेगा।

1. निविदादाता द्वारा निविदा शुल्क, बोली प्रतिभूति राशि का डी.डी./ बैंकर चैक तकनीकी निविदा के साथ प्रस्तुत करने होंगे। फर्म पूर्व में कभी ब्लैकलिस्टेड घोषित नहीं की गई है एवं फर्म के विरुद्ध पूर्व में कभी पुलिसकार्य वाही नहीं की गई है, न ही माननीय न्यायालय द्वारा कभी दंडित किया गया है और न ही किसी प्रकार की कोई विजिलेंस जॉच लंबित है इस बाबत सौ रुपये कि स्टाम्प पर शपथ-पत्र नोटरी करवाकर, आयकर पेन न. की छायाप्रति, जीएसटी विभाग में पंजीकृत होने के प्रमाण पत्र, जीएसटी चालान/ जीएसटी रिटर्न की छायाप्रति, निविदा की शर्तों व सामान्य निविदा शर्तों जिन पर निविदादाता के प्रत्येक पृष्ठ पर हस्ताक्षर हो, Annexure A, B, C, D, SR-11 and Bid Securing Declaration Form निर्धारित निविदा की अन्तिम तिथि व समय तक अधोहस्ताक्षरकार्यालय में जमा/प्राप्त हो जाने चाहिए अन्यथा निविदा स्वीकार योग्य नहीं होगी।
2. निविदा शुल्क व बोली प्रतिभूति राशि की डी0डी0/ बैंकर चैक अधिष्ठाता, पशुचिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर के नाम से देय होनी चाहिये।
3. कम सख्या 3,5,10,11,12,13,14,15,17 व 18 तक की पात्रता पूरी करने वाले योग्य निविदादाता ही तकनीकी बिड (प्रि-क्वालीफिकेशन) में सफल माने जावेगी उन्ही की वित्तीय बिड खोली जावेगी। तकनीकी बिड (प्रि-क्वालीफिकेशन) योग्य नहीं पाये जाने वाले निविदादाता की वित्तीय बिड नहीं खोली जावेगी। निविदादाता द्वारा उक्त निविदा तय प्रपत्र निर्धारित अवधि में ही भरनी होगी, जिसके अभाव में निविदा स्वतः ही निरस्त मानी जायेगी। वित्तीय बिड खोलने की तिथि अलग से सूचित कर दी जावेगी।


अधिष्ठाता

मै/हम पशु चिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर द्वारा जारी की गई निविदा सूचना स. 22/2025-26 में वर्णित तथा सलंगन निविदा शर्तों की पालना करने हेतु सहमत है।

निविदादाता के हस्ताक्षर मय मोहर



COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

वित्तीय बिड

खुली प्रतियोगी बोली सूचना सं0 22/2025-26

Supply And Installation All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA हेतु खुली प्रतियोगी बोली आमंत्रण सूचना सं0 22/2025-26 की वित्तीय बिड

विवरण:


क0 सं0	निविदाभरने का प्रकार	ऑफलाईन																										
1	निविदा प्रस्तुत करने वाली फर्म / संस्था का नाम, पता, दूरभाष / मोबाईल न. व ई-मेल पता																											
2	निविदाजिसे प्रस्तुत की जानी है	अधिष्ठाता, पशुचिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर																										
3	S.No	कार्य का विवरण	Rates Offered (In Rupees) (Without GST) including Complete installation	GST mention in percent age																								
	I.	All in One PC	Rs. Nos	Each																								
		<table border="1"> <thead> <tr> <th>Item</th> <th>Specifications</th> </tr> </thead> <tbody> <tr> <td>Form Factor</td> <td>All in one</td> </tr> <tr> <td>Chassis</td> <td>PC & Monitor integrated in one Chassis</td> </tr> <tr> <td>Chipset</td> <td>Commercial Class Intel® Q670 Chipset or higher</td> </tr> <tr> <td>Processor</td> <td>Intel® 13th Generation or higher</td> </tr> <tr> <td>Memory</td> <td>16 GB Memory expandability up to 64 GB with 2 DIMM Slots</td> </tr> <tr> <td>Storage</td> <td>1TB SSD</td> </tr> <tr> <td>Graphics</td> <td>Intel® UHD Graphics</td> </tr> <tr> <td>Audio</td> <td>Integrated audio controller with internal stereo speaker of atleast 2X2W</td> </tr> <tr> <td>Operating System</td> <td>Microsoft Windows 11 Professional with OEM Recovery DVD or option of Cloud Recovery with Preinstalled MS office</td> </tr> <tr> <td>Networking</td> <td>Integrated Intel® Ethernet Gigabit ethernet</td> </tr> <tr> <td></td> <td>Intel® Wi-Fi 6E AX211 802.11ax 2x2 with</td> </tr> </tbody> </table>	Item	Specifications	Form Factor	All in one	Chassis	PC & Monitor integrated in one Chassis	Chipset	Commercial Class Intel® Q670 Chipset or higher	Processor	Intel® 13th Generation or higher	Memory	16 GB Memory expandability up to 64 GB with 2 DIMM Slots	Storage	1TB SSD	Graphics	Intel® UHD Graphics	Audio	Integrated audio controller with internal stereo speaker of atleast 2X2W	Operating System	Microsoft Windows 11 Professional with OEM Recovery DVD or option of Cloud Recovery with Preinstalled MS office	Networking	Integrated Intel® Ethernet Gigabit ethernet		Intel® Wi-Fi 6E AX211 802.11ax 2x2 with		
Item	Specifications																											
Form Factor	All in one																											
Chassis	PC & Monitor integrated in one Chassis																											
Chipset	Commercial Class Intel® Q670 Chipset or higher																											
Processor	Intel® 13th Generation or higher																											
Memory	16 GB Memory expandability up to 64 GB with 2 DIMM Slots																											
Storage	1TB SSD																											
Graphics	Intel® UHD Graphics																											
Audio	Integrated audio controller with internal stereo speaker of atleast 2X2W																											
Operating System	Microsoft Windows 11 Professional with OEM Recovery DVD or option of Cloud Recovery with Preinstalled MS office																											
Networking	Integrated Intel® Ethernet Gigabit ethernet																											
	Intel® Wi-Fi 6E AX211 802.11ax 2x2 with																											

निविदादाता के हस्ताक्षर मय मोहर




COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

		Bluetooth® M.2 Combo		
	Ports	Video: 1 Display Port ,1 HDMI in, 1 HDMI out		
		USB:2 USB 3.2 Gen 1, 2 USB 3.2 Gen 2, 1 USB Type C 3.2 Gen 2		
	Slots	2 M.2 PCIe for WLAN & Storage		
	Bays	1 Internal Bay		
	Keyboard	USB Wired Keyboard,		
	Mouse	USB Optical Wired Mouse		
	Power Supply	120-240 W power supply		
	Volume	as per OEM		
	Security	Hardware based endpoint security controller TPM 2.0 Integrated Intrusion Sensor Support for chassis cable lock devices Drive lock option for HDD to secure Data Integrated protection from malware that lurks on malicious websites Integrated real-time detection and prevention of zero-day threats and advanced persistent threat (APT) attacks for Windows applications		
	Manageability	Out of band management independent of the power state and operating system state of PC Integrated utility to enables hardware level testing outside the operating system & Drivers should be available on OEM Website for download		
	Certifications	Microsoft Windows 11 FCC, CE, RoHS, UL, EPEAT, Energy Star, TCO, MIL STD 810H ISO 9001,14001,20001,27001		
	Display	23.8" IPS, antiglare with Minimum resolution of 1920x1080, 16:9 aspect ratio Integrated 5 MP webcam		
	Warranty	3 Years onsite		
II.	Interactive Smart Display		Rs. Nos	Each
	Display Panel Size	86 Inches or higher		
	Light Source	DLED backlight		
	Resolution	3840 × 2160 (4K UHD)		
	Refresh Rate	60Hz		
	Aspect Ratio	16:9 or better		
	Display Colour	1.07 Billion colors (10-bit) or higher		
	Surface	4mm Anti-glare tempered glass		
	Brightness	Upto 450 cd/m ² or better		
	Haze	25%		





COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

Contrast Ratio	1200:1 or better
Viewing Angle	178° (H/V)
Backlight Life	≥ 50,000 hours or better
Touch Technology	IR Touch
Touch Points	40 touch points on Android & Windows or better
Touch Response	≤ 5 ms or less
Touch Accuracy	± 2 mm or less
CPU	Octa-Core A55 or better
GPU	Quad-Core MaliG52 or better
RAM + ROM	8GB RAM + 128GB Storage or better
Operating System	Android 14.0
Wi-Fi	802.11 a/b/g/n/ac (2.4GHz/5GHz)
Bluetooth	5.0 or latest
Speakers	2 × 20 W or better
Interfaces	5× USB 3.0/USB 2.0, 1× Type-C, 1x TF Card Slot, 3x HDMI IN (1 ARC), 1x Touch USB, 1x RS232, 1x Line Out, 1x Coax, 1x RJ45 IN, 1x 3.5mm Jack, 1x VGA IN, 1x VGA Audio IN
Whiteboard Features	Multi-touch interactive whiteboard (upto 20 points), handwriting-to-text, AI shape recognition, math/science tools, sticky notes, text editing, real-time collaboration, export to PDF, YouTube & Google integration, browser panel, 3D model viewer, screen capture
Built in VC Software	The solution should support up to 100 participants in an online session, allow transmission of up to 4 camera feeds simultaneously, and provide 4K video, chat, data collaboration, and whiteboard features. It should also support local recording of sessions, have valid Web Security / Vulnerability & Penetration Testing Certificates, and the Interactive Display with VC software must be from the same OEM
Additional Features	The system should include a scheduling option with VC link sharing, support multiple cameras (minimum 4) with voice-activated switching layout, and offer advanced bandwidth optimization. It must support webinars with Q&A via chat along with YouTube live integration, and provide a VC client for smartphones & iPads with secure video/data encryption.
Accessories	Power Cord ×1, Stylus Pen ×2, Wall Mount Kit ×1, Remote Control ×1, User Manual ×1
Certifications	BIS, CE, FCC & RoHS



COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

III.	Interactive Podium	Rs. Nos	Each																																				
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parameter</th> <th style="width: 75%;">Specifications</th> </tr> </thead> <tbody> <tr> <td>Top Body</td> <td>Top and Body should be Metal.</td> </tr> <tr> <td>Mechanism</td> <td>The system should have a Top Sliding Mechanism.</td> </tr> <tr> <td>Keyboard/Mouse Tray</td> <td>It should have sliding Tray for Keyboard /Mouse</td> </tr> <tr> <td>Visualizer Tray</td> <td>It should have a Provision for Visualizer with a Sliding Tray.</td> </tr> <tr> <td>Wheels</td> <td>Its should have Wheels for easy movement.</td> </tr> <tr> <td>Rack Space</td> <td>Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.</td> </tr> <tr> <td>Screen Size</td> <td>The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office</td> </tr> <tr> <td>Type</td> <td>The monitor should be LED backlight.</td> </tr> <tr> <td>Resolution</td> <td>1080p</td> </tr> <tr> <td>Port</td> <td>The monitor should come with a USB port for PC Connection.</td> </tr> <tr> <td>Brightness</td> <td>The monitor should have a Luminosity of 350 cd/m² or more.</td> </tr> <tr> <td>Input port</td> <td>The monitor should have a VGA, HDMI or DVI Input port.</td> </tr> <tr> <td>Supply</td> <td>The monitor should support Power Supply of 100 ~ 250VAC.</td> </tr> <tr> <td>Laptop Interface</td> <td> <p>The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1</p> <p>It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more</p> <p>It shall have basic selection control buttons for the four inputs, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.</p> </td> </tr> <tr> <td>Audio/Media Controller</td> <td>Available</td> </tr> <tr> <td>Built-in DSP</td> <td>100W, Frequency Range 30 Hz – 15,000 Hz Automatic Echo Cancellation, Automatic Gain Control, Dynamic Noise Reduction, Full Duplex Connectivity 1× Line Input, 1× Line Output, 1× USB Port</td> </tr> <tr> <td>Built in devices</td> <td>Central Control Panel-Available Gooseneck Mic-1</td> </tr> </tbody> </table>	Parameter	Specifications	Top Body	Top and Body should be Metal.	Mechanism	The system should have a Top Sliding Mechanism.	Keyboard/Mouse Tray	It should have sliding Tray for Keyboard /Mouse	Visualizer Tray	It should have a Provision for Visualizer with a Sliding Tray.	Wheels	Its should have Wheels for easy movement.	Rack Space	Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.	Screen Size	The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office	Type	The monitor should be LED backlight.	Resolution	1080p	Port	The monitor should come with a USB port for PC Connection.	Brightness	The monitor should have a Luminosity of 350 cd/m ² or more.	Input port	The monitor should have a VGA, HDMI or DVI Input port.	Supply	The monitor should support Power Supply of 100 ~ 250VAC.	Laptop Interface	<p>The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1</p> <p>It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more</p> <p>It shall have basic selection control buttons for the four inputs, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.</p>	Audio/Media Controller	Available	Built-in DSP	100W, Frequency Range 30 Hz – 15,000 Hz Automatic Echo Cancellation, Automatic Gain Control, Dynamic Noise Reduction, Full Duplex Connectivity 1× Line Input, 1× Line Output, 1× USB Port	Built in devices	Central Control Panel-Available Gooseneck Mic-1		
Parameter	Specifications																																						
Top Body	Top and Body should be Metal.																																						
Mechanism	The system should have a Top Sliding Mechanism.																																						
Keyboard/Mouse Tray	It should have sliding Tray for Keyboard /Mouse																																						
Visualizer Tray	It should have a Provision for Visualizer with a Sliding Tray.																																						
Wheels	Its should have Wheels for easy movement.																																						
Rack Space	Its should have Rack Space for keeping Amplifier, CPU, Microphone receiver or more equipment.																																						
Screen Size	The system should consist of 21.5 Inches Touch Screen Monitor with i5 or more processor CPU with keyboard and mouse, with licensed windows operating system and Microsoft office																																						
Type	The monitor should be LED backlight.																																						
Resolution	1080p																																						
Port	The monitor should come with a USB port for PC Connection.																																						
Brightness	The monitor should have a Luminosity of 350 cd/m ² or more.																																						
Input port	The monitor should have a VGA, HDMI or DVI Input port.																																						
Supply	The monitor should support Power Supply of 100 ~ 250VAC.																																						
Laptop Interface	<p>The system should consist of the at least following ports on the interface with integrated Switcher having following Ports USB Type C-1, USB 2.0 Type A- 3, USB 3.0 Type A- 1, Aux-1, LAN-1, HDMI-In 4, HDMI-Out-1, RS232-1</p> <p>It should come with integrated button pad controller to switch between HDMI , VGA and USB Ports. It shall have HD video inputs for CPU, 2x Laptop Inputs, Visualizer or more</p> <p>It shall have basic selection control buttons for the four inputs, Microphone Control Buttons, Volume Control Buttons, projector Control Buttons, Screen up/Down Buttons.</p>																																						
Audio/Media Controller	Available																																						
Built-in DSP	100W, Frequency Range 30 Hz – 15,000 Hz Automatic Echo Cancellation, Automatic Gain Control, Dynamic Noise Reduction, Full Duplex Connectivity 1× Line Input, 1× Line Output, 1× USB Port																																						
Built in devices	Central Control Panel-Available Gooseneck Mic-1																																						

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

		<p>Wireless Mic-1 Handheld Mic-1 Wireless Receiver-1 Amplifier Wattage (Watt) 200</p> <p>Gooseneck Mic Port 1x Microphone should come up with standard 3 PIN XLR Connector.</p> <p>Speakers (1 Pair) 50 W Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90 Hz-20 kHz Frequency Response)</p> <p>Certifications It should have CE, FCC and RoHS</p>		
IV.	<p>Layer 2 Manageable Gigabit NON-POE Switch</p> <p>Switch Specification</p> <p>Should Support at least 24 X 10/100/1000BASE-T Ports and 4 X SFP+ Ports.</p> <p>Should Support console port , RJ-45 port for out of band-management port for accessing the CLI of the switch and USB port for connecting a USB storage device.</p> <p>Should Support Switching capacity should be 128 Gbps or higher or non-blocking architecture.</p> <p>Should Support 64 Bytes packet forwarding rate should be 95.24 Mpps or higher</p> <p>Switch MAC table should be at least 16K or higher.</p> <p>Should Support standard 19-inch 1U rack mountable.</p> <p>Should Support MTBF 530,607 hours</p> <p>Should Support Physical Stacking up to 9 units per stack. Stacking bandwidth should be up to 80G and up to 32 devices per virtual stack.</p> <p>Should Support Operating temperature should be 0 to 50 °C. Storage Temperature - 20 to 70 °C</p> <p>Should Support EMI Certificates CE, FCC, UL, MTCTE (TEC-ER)</p> <p>OEM Should have Certificate for Industrial Cyber Security Capability (Like - IEC-62443-4-1:2018 or Equivalent Indian Certificate). OEM/Product must be on Trusted Telecom Portal of Department of Telecommunication, Government of India.</p> <p>Switch Software Specification</p> <p>Should have 802.1D STP, 802.1w RSTP and 802.1s MSTP Spanning Tree Protocol and ERPS as per standard ITU-T G.8032 to provide protection for Ethernet traffic in ring topology.</p> <p>Should support BPDU Filter, BPDU restriction, Root restriction, Link Aggregation (Max. 32 groups per device, 8 ports per group)</p> <p>Should support Loopback detection (LBD) to detect the loop created by a specific port.</p> <p>Should support IGMP Snooping v1/V2/V3 & IGMP groups 1K or more IGMP groups and require support for IGMP Snooping Fast Leave.</p>	Rs. Nos	Each	

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

Should Support MLD Snooping v1/v2 & MLD group 1K or more and require support for MLD Snooping Querier.		
Should support 64 IP interfaces and IPv4/IPv6 Loopback interface.		
Should support IPv6 Neighbor Discovery (ND).		
Should support Static route for both IPv4 and IPv6, IPv4: 128 (64 static + 64 local), IPv6: 96 (32 static + 64 local), L3 Forwarding Table Entries 1K.		
Should support IEEE 802.1Q VLAN Port based, Voice VLAN, Private, Double (Q-In-Q), Multicast VLAN, 802.1v Protocol VLAN, VLAN Trunking, GVRP		
Should have per-port broadcast, multicast, and unicast storm control to prevents faulty end stations from degrading overall systems performance.		
Should support port security to secures the access port based on MAC address. Port Mirroring, RSPAN, L2 Tunneling, Flex Link.		
Should be support DoS attacks, Prevent TCP over MAC Multicast/Broadcast, Prevent TCP/UDP Port is Zero.		
Should support DHCP snooping and DHCP Server Screening traps, DHCP relay Option 60, 61, and 82, DHCP client DHCP auto-configuration.		
Should support 802.1X port based, Support EAP, TLS, TTLS and PEAP, MD5 authentication, Support VLAN based authentication for client roaming.		
Switch Should support RADIUS and TACACS+ authentication.		
Should support Authentication database failover, Compound authentication, Dynamic VLAN assignment, Identity Driven WAC policy assignment. Microsoft® NAP (IPv4) Guest VLAN.		
Should support QoS (quality of service) IEEE 802.1P for traffic prioritization. It should support 8 queues per port.		
Should support different type of QoS priority like Strict Priority Queue and Weighted Round Robin, Strict + WRR, Weighted Deficit Round Robin (WDRR) Deficit Round Robin (DDR)		
Should support Remark 802.1p priority, DSCP, Outer VID, ToS/IP preference.		
Support at least 2K ingress & 1K egress access control entries. ACL based on MAC, IPv4 and IPv6, TCP/UDP port number, User-defined packet contentm, CPU Interface Filtering. Should support time-based ACL.		
Able to manage trough Web-GUI, fully functional CLI interface and Telnet.		
Should have multiple Image and configuration support to reduced down time for the switches.		
Should support sFlow for monitoring traffic in data networks, SNMP v1, v2c, v3 and SNMP Traps and RMON, System log, 802.1AB LLDP, LLDP-MED.		
Should have SNTP/NTP protocol for time synchronization. PD Alive, PPPoE circuit-ID tag insertion.		

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

<p>Password encryption.</p>		
<p>Should support Operations, Administration, and Management (OAM), 802.3ah Ethernet Link OAM, 802.1ag Connectivity Fault Management (CFM) Dying Gasp, Cable diagnostics.</p>		
<p>OEM Should be international certification for the ISO 45001 Health and Safety Management System, Information Security Management System: ISO 27001, ISO 9001 Quality Management System, ISO 14001 Environmental Management System, and ISO 14064-1 Greenhouse Gas Inventory Standards.</p>		
<p>Should be supplied with the all-necessary components like Two Power supply, Two Power cord, All Fan Module, Console Cable, Rack-mount kit, Installation Guide, etc. and necessary software image file to fulfil all above mention feature set from day 1. All Passive and Active should be same OEM.</p>		
<p>Unshielded Twisted Pair Category 6 Cable</p>		
<p>Features</p>		
<p>Category 6 Unshielded Twisted 4 pair shall be compliant with ANSI/TIA/EIA-568-C.2 and ISO/IEC 11801 Class E.</p>		
<p>Should support 1000BASE-T (1 Gigabit Ethernet) standard.</p>		
<p>Category 6 should operate on bandwidth up to 250MHz as per standard.</p>		
<p>Construction Characteristics</p>		
<p>Conductor should be 23 AWG solid bare copper.</p>		
<p>Conductor Insulation material should be HDPE.</p>		
<p>Four twisted pairs separated by internal X shaped, full separator. Half shall not be accepted.</p>		
<p>Sheath material should be FR-PVC as per IEC-60332-1.</p>		
<p>Cable outer diameter should be 6.1 mm nominal.</p>		
<p>Cable weight should be 13.6Kg/Box. UL Marking on Cable jacket is madnatory.</p>		
<p>Electrical Properties</p>		
<p>Conductor Resistance: $\leq 9.38\Omega/100m$</p>		
<p>Mutual Capacitance: $< 5.6nF/100m$</p>		
<p>Resistance Unbalance: 5% Max</p>		
<p>Delay Skew: $< 50nS$</p>		
<p>Capacitance unbalance: 330pF/100m</p>		
<p>NVP: 69%</p>		
<p>Other Characteristics</p>		
<p>Each meter printed with sequential Length Counter</p>		
<p>Temperature Range -20° to $+70^{\circ}C$</p>		
<p>Approval : UL Listed & ETL Verified</p>		
<p>Cable Should be RoHS Compliant.</p>		
<p>Note</p>		
<p>OEM for the cable Box and all copper Accessories should be from same OEM.All Passive Should be from from same</p>		

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

OEM.

Unshielded Twisted Pair Category 6 Loaded Patch Panel - 24 Port

Features

Category 6 24 port Patch Panel should be 24 Port 1U Size loaded with 24 port RJ-45 IO.

Mounts in standard 19 inch racks.

Patch panel should have cable manager for improvement management.

Patch panel suitable for Category 6 keystone.

Panel material should have SPCC and Black Color.

Rear support bar material should have SPCC and Black Color.

RJ-45 jack housing should be PBT + Glass fiber UL94V-O and Contact brackets should be PBT + Glass fiber UL94V-O.

Rj-45 contact material should be phosphor bronze with nickel plated and plug contact area finish with 50 micro-inches Gold plated.

Contact resistance should be maximum 20 miliohm.

Operating Temperature should be -10° Celsius to 60° Celsius.

Life of RJ-45 Jack should be 750 cycles minimum @ 500 VDC.

Unshielded Twisted Pair Category 6 UTP Patch Cord - 1 Mtr

Features

Category 6 patch cords with four pair twisted cable terminated with RJ45 modular plugs at both the ends.

Patch Cord should have TIA/EIA 568C.2 standard.

Category 6 patch cord should be 100% factory made and performance tested.

Insulation Material:

UL Application - PC UL94-V-0

Category 6 patch cord length requires – 1/3 meter.

Color code for Patch Cord: Grey/Blue/Green

Cat6 Patch cord should be ETL Verified.

Performance Characteristics

Patch cord conductor should be 24 AWG, multi-strands.

Patch cord conductor metal should be made from bare copper.

Insulation material should be high density polyethylene, material used should be FRPVC

Insertion cycle- 750 Times.

Dielectric volatge- 1000V DC/Min <05A

Insulation Resistance - >500M Ohm, 1000DC/Min

Modular Connector/Plug Characteristics


Patch cord plug should be gold plated.

Patch cord should support heat resistance max 75 degree C

Contact blade of plug should be made from copper alloy.

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="background-color: #cccccc;">Unshielded Twisted Pair Category 6 Jack / IO</td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Features</td> </tr> <tr> <td colspan="2">Category 6 keystone jacks are RJ45, 8 position 8 contact socket.</td> </tr> <tr> <td colspan="2">Category 6 keystone jacks are suitable for 22-26 AWG stranded and solid wire.</td> </tr> <tr> <td colspan="2">Category 6 keystone jacks are compatible with both 110 & Krone punch down tools.</td> </tr> <tr> <td colspan="2">The Category 6 keystone jacks shall be backward compatible with Category 5e, 5 and 3 cords and cables.</td> </tr> <tr> <td colspan="2">It compliance with ANSI/TIA/EIA 568 C.2 standard.</td> </tr> <tr> <td colspan="2">The Category 6 keystone jacks shall be of a universal design supporting T568 A & B wiring.</td> </tr> <tr> <td colspan="2">Color of Keystone Jack: White</td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Mechanical Characteristics</td> </tr> <tr> <td colspan="2">Category 6 keystone jacks housing made from PC, UL 94V-2 material.</td> </tr> <tr> <td colspan="2">RJ45 Jack contact material should be phosphor bronze with nickel plated. Finished with 50 micro-inch gold plated on plug contact area.</td> </tr> <tr> <td colspan="2">IDC Housing made from PC, UL 94V-2. Terminal material should be Phosphor bronze with tin plated.</td> </tr> <tr> <td colspan="2">Should have IDC CAP and material of IDC Cap should be PC, UL 94V-2.</td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Performance Characteristics</td> </tr> <tr> <td colspan="2">Current rating should be 1.5A.</td> </tr> <tr> <td colspan="2">Operating Temperature should be -10° Celsius to 60° Celsius.</td> </tr> <tr> <td colspan="2">Life of Jack should be 750 cycles minimum (ISO/IEC 11801 / IEC 60603-7-4).</td> </tr> <tr> <td colspan="2"></td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Face Plate Single Port with Back Box</td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Features</td> </tr> <tr> <td colspan="2">Face plate should be single port with Back box.</td> </tr> <tr> <td colspan="2">Face Plate should have shutter to protect from dust.</td> </tr> <tr> <td colspan="2">It should have write on labels in transparent plastic window – supplied with plate</td> </tr> <tr> <td colspan="2">Face plate material: ABS with white color</td> </tr> <tr> <td colspan="2">Screw should be supplied with face plate.</td> </tr> <tr> <td colspan="2" style="background-color: #cccccc;">Note</td> </tr> <tr> <td colspan="2">OEM for the cable Box and all copper and fibre Accessories should be from same OEM.</td> </tr> </table>	Unshielded Twisted Pair Category 6 Jack / IO		Features		Category 6 keystone jacks are RJ45, 8 position 8 contact socket.		Category 6 keystone jacks are suitable for 22-26 AWG stranded and solid wire.		Category 6 keystone jacks are compatible with both 110 & Krone punch down tools.		The Category 6 keystone jacks shall be backward compatible with Category 5e, 5 and 3 cords and cables.		It compliance with ANSI/TIA/EIA 568 C.2 standard.		The Category 6 keystone jacks shall be of a universal design supporting T568 A & B wiring.		Color of Keystone Jack: White		Mechanical Characteristics		Category 6 keystone jacks housing made from PC, UL 94V-2 material.		RJ45 Jack contact material should be phosphor bronze with nickel plated. Finished with 50 micro-inch gold plated on plug contact area.		IDC Housing made from PC, UL 94V-2. Terminal material should be Phosphor bronze with tin plated.		Should have IDC CAP and material of IDC Cap should be PC, UL 94V-2.		Performance Characteristics		Current rating should be 1.5A.		Operating Temperature should be -10° Celsius to 60° Celsius.		Life of Jack should be 750 cycles minimum (ISO/IEC 11801 / IEC 60603-7-4).				Face Plate Single Port with Back Box		Features		Face plate should be single port with Back box.		Face Plate should have shutter to protect from dust.		It should have write on labels in transparent plastic window – supplied with plate		Face plate material: ABS with white color		Screw should be supplied with face plate.		Note		OEM for the cable Box and all copper and fibre Accessories should be from same OEM.			
Unshielded Twisted Pair Category 6 Jack / IO																																																											
Features																																																											
Category 6 keystone jacks are RJ45, 8 position 8 contact socket.																																																											
Category 6 keystone jacks are suitable for 22-26 AWG stranded and solid wire.																																																											
Category 6 keystone jacks are compatible with both 110 & Krone punch down tools.																																																											
The Category 6 keystone jacks shall be backward compatible with Category 5e, 5 and 3 cords and cables.																																																											
It compliance with ANSI/TIA/EIA 568 C.2 standard.																																																											
The Category 6 keystone jacks shall be of a universal design supporting T568 A & B wiring.																																																											
Color of Keystone Jack: White																																																											
Mechanical Characteristics																																																											
Category 6 keystone jacks housing made from PC, UL 94V-2 material.																																																											
RJ45 Jack contact material should be phosphor bronze with nickel plated. Finished with 50 micro-inch gold plated on plug contact area.																																																											
IDC Housing made from PC, UL 94V-2. Terminal material should be Phosphor bronze with tin plated.																																																											
Should have IDC CAP and material of IDC Cap should be PC, UL 94V-2.																																																											
Performance Characteristics																																																											
Current rating should be 1.5A.																																																											
Operating Temperature should be -10° Celsius to 60° Celsius.																																																											
Life of Jack should be 750 cycles minimum (ISO/IEC 11801 / IEC 60603-7-4).																																																											
Face Plate Single Port with Back Box																																																											
Features																																																											
Face plate should be single port with Back box.																																																											
Face Plate should have shutter to protect from dust.																																																											
It should have write on labels in transparent plastic window – supplied with plate																																																											
Face plate material: ABS with white color																																																											
Screw should be supplied with face plate.																																																											
Note																																																											
OEM for the cable Box and all copper and fibre Accessories should be from same OEM.																																																											
V.	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">Online UPS 6 KVA</td> </tr> <tr> <td style="width: 30%;">UPS Rating & Architecture</td> <td>6KVA Floor Mount UPS</td> </tr> <tr> <td>Technology</td> <td>True Online Double Conversion Technology (VFI-SS-111)</td> </tr> <tr> <td>I/P Voltage Range</td> <td>170V to 280 VAC based on load level</td> </tr> </table>	Online UPS 6 KVA		UPS Rating & Architecture	6KVA Floor Mount UPS	Technology	True Online Double Conversion Technology (VFI-SS-111)	I/P Voltage Range	170V to 280 VAC based on load level	Rs. Nos	Each																																																
Online UPS 6 KVA																																																											
UPS Rating & Architecture	6KVA Floor Mount UPS																																																										
Technology	True Online Double Conversion Technology (VFI-SS-111)																																																										
I/P Voltage Range	170V to 280 VAC based on load level																																																										



COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

Input Frequency	50 Hz +/-10%
I/P Power Factor	0.99
THD current	< 5%
O/P Voltage (Single Phase)	220/230/240V AC +/- 1%
O/P Frequency	50 Hz +/- 0.1 Hz
THD voltage	< 1 % for Linear Load; < 3 % for Non-Linear Load
Overload Rating @ unity Output Power Factor	105-110%- 60 mins, 111% to 125 % - 10mins ; 126% to 150 % - 1 min & > 150%- 0.5 sec
O/P waveform	Pure sinewave
O/P Power Factor	Unity (6 KVA=6 KW)
Overall Efficiency	>93% @ full linear load
Parallel Kit Cable	UPS should have Parallel kit (Inbuilt)
Inbuilt Static Bypass	Should be Available
Inbuilt Maintenance Bypass	Should be Available
LED Status Indication	Normal mode, Load on battery, Bypass mode, Warning
LCD Display Indication	Input & Output Voltage/ Frequency, Battery voltage, Load percentage, Fault codes, Overload, Short circuit, Low Battery
EPO	Should be Available
Audible Alarm	Battery-powered operation, Bypass input out of range, Operation in bypass mode, UPS fault (with error codes), Overload
Battery Bank details for 30 mins	26AH x 18 No's SMF Batteries
Communication Ports	RS232, USB
Operating Temperature	0 to 40 Deg C
Make in India	Yes
UPS Model Certificates	CE, PEP, REACH and BIS (Capacity & Modelwise)
UPS Test Report	Third Party NABL approved Test Lab report required (Should not be older than 5 Years)
Approved UPS Make	Numeric (Legrand), Vertiv, APC (Schneider)
Approved Battery Make	Exide, Quanta, Panasonic
UPS & Batteries Accessories	MS Open Battery Rack, UPS to Batteries DC Cable and Interlinks


COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

		After Sales Support	UPS OEM should have own service center in Bikaner (No third party)		
--	--	---------------------	--	--	--

मै/हम पशु चिकित्सा एवं पशु विज्ञान महाविद्यालय, बीकानेर द्वारा जारी की गई खुली प्रतियोगी बोली सूचना स.22/2025-26 में वर्णित तथा सलंगन निविदा शर्तों की पालना करन हेतु सहमत है ।

निविदादाता के हस्ताक्षर


निविदादाता के हस्ताक्षर मय मोहर

A handwritten signature in blue ink is present, along with a circular stamp or mark.

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

खुली प्रतियोगी बोली आमंत्रण सूचना सं. 22/2025-2026 की शर्तें

1. जिस निविदादाता की Supply and installation All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA की दरें कम व वाजिब होंगी उसे ही स्वीकार किया जायेगा ।
2. निविदा दो कवर यानि दो अलग अलग लिफाफें "अ" तकनीकी बिड व "ब" वित्तीय बिड में दिनांक 27.03.2026 को सुबह 11.30 बजे तक अधोहस्ताक्षरकर्ता कार्यालय में प्रस्तुत करनी होगी ।
3. उक्त आईटमस का मेक तकनीकी बिड में अंकित करना होगा अन्यथा तकनीकी निविदा में असफल घोषित किया जावेगा ।
4. निविदादाता की दर वित्तीय बिड में प्रस्तुत करनी होगी। जीएसटी को छोड़कर पैकिंग, परिवहन खर्च Installation सहित इत्यादि सम्मिलित कर देनी होगी ।
5. निविदादाता द्वारा निविदा हेतु दर वित्तीय बिड में दर प्रतिनग के हिसाब से प्रस्तुत करनी होगी। वित्तीय बिड में **without GST** दर प्रस्तुत करनी होगी, **GST** अलग से प्रतिशत में अंकित करे । उक्त सभी **Items (All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA)** की वारण्टी अवधि कम से कम 01 वर्ष की होनी आवश्यक है ।
6. फर्म के बिलमें से नियमानुसार जीएसटी एवं आयकर की कटौती की जावेगी ।
7. निविदा (तकनीकी व वित्तीय) प्रस्तुत करने की अन्तिम दिनांक 27.03.2026 को सुबह 11.30 बजे तक होगी ।
8. निविदा की तकनीकी बिड 27.03.2026 को दोपहर 03.30 बजे गठित कमेटी द्वारा खोली जायेगी ।
9. तकनीकी बिड (प्रि-क्वालीफिकेशन) में सफल होने वाले निविदादाताओ की ही वित्तीय बिड कमेटी द्वारा खोली जावेगी ।
10. बिना निविदा शुल्क व बोली प्रतिभूती इत्यादि के निविदा पर कोई विचार नहीं किया जायेगा ।
- 11- निविदा का निविदा शुल्क, बोली प्रतिभूति रेखांकित बैंकर चैक या डीडी द्वारा भुगतान करना होगा, जोकि "अधिष्ठाता, पशु चिकित्सा और पशु विज्ञान महाविद्यालय, बीकानेर के नाम पर देय होनी चाहिए अथवा निविदा शुल्क, बोली प्रतिभूति नगद केशियर को जमाकरवा कर जमा रसीद की छाया प्रति प्रस्तुत करे ।



COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

- 12- निविदा की सामान्य निविदा शर्तें व Annexure a to d, SR 11, Annexure-फर्म पूर्व में कभी ब्लैकलिस्टेड घोषित नहीं की गई है एवं फर्म के विरुद्ध पूर्व में कभी पुलिस कार्यवाही नहीं की गई है, न ही माननीय न्यायालय द्वारा कभी दंडित किया गया है और न ही किसी प्रकार की कोई विजिलेंस जॉच लंबित है इस बाबत सौ रूपये कि स्टाम्प पर शपथ-पत्र नोटरी करवाकर, निविदा शुल्क व बोली प्रतिभूति इत्यादि तकनीकी निविदा के साथ प्रस्तुत करना होगा ।
- 13- निविदा की बोली प्रतिभूति राशि व अनुमानित राशि निम्न प्रकार से है:-
- (i) बोली प्रतिभूति राशि निविदा की अनुमानित लागत की दो प्रतिशत के हिसाब से राशि रू0 19000/-होगी ।
- (ii) अनुमानित लागत- रू0. 9.50 लाख
14. निविदादाता को सप्लाई आदेश जारी किया जायेगा तथा आदेशानुसार सप्लाई कार्यालय के समय में ही महाविद्यालय के केन्द्रीय भण्डार, सी.वी.ए. एस., बीकानेर में 05 दिन के अन्दर सप्लाई कर संबंधित विभाग में स्थापित करनी होगी ।
15. जिस निविदादाता को **Smart Class** तैयार करने हेतु **Items (All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA)** की सप्लाई हेतु आदेश जायेगा उसे नियमानुसार **performance security** जमा करानी होगी। निविदा के साथ जमा कराई गई बोली प्रतिभूति को **performance security** में समायोजित कर ली जावेगी, जो कि सप्लाई आदेश के अनुसार **Items (All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA)** सप्लाई करने व वारण्टी अवधि समाप्त होने पर एवं सन्तोषजनक रिपोर्ट प्राप्त होने पर ही लौटाई जावेगी ।
16. यदि निविदादाता आदेश के अनुसार उक्त आईटमस की सप्लाई नहीं कर सका तो आईटमस अन्य व्यापारी/फर्म से खरीद लिया जायेगा। आईटमस अन्य व्यापारी/फर्म से खरीद कर लगवाने पर यदि विश्वविद्यालय को अधिक भुगतान करना पड़ा तो अधिक भुगतान की गई राशि फर्म के बिलों में से अथवा **performance security** के रूप में जमा राशि में से वसूल कर ली जावेगी ।
17. बोली प्रतिभूति एवं **performance security** निम्न अवस्थाओं में जब्त कर ली जावेगी :-
- अ. यदि निविदादाता द्वारा आईटमस निर्धारित समय में सप्लाई नहीं किया जाता है।

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

ब. यदि निविदादाता के विषय में अन्य कोई शिकायत रही या आदेश का उल्लंघन किया गया ।

स. निर्धारित अवधि में अनुबंध नहीं करता है ।

18. निविदा स्वीकृत आदेश तथा सप्लाई अवधि आदि में परिवर्तन का अन्तिम व पूर्ण अधिष्ठाता पशु चिकित्सा और पशु विज्ञान महाविद्यालय, बीकानेर को होगा। यह निविदादाता को मान्य होगा ।
19. सप्लाई किये गये आईटमस का मेक/गुणवत्ता का मिलान करने पर गुणवत्ता निम्न पायी गई तो सामग्री को अस्वीकार कर दिया जायेगा इस प्रकार अस्वीकार सामग्री को तुरन्त स्टोर/निर्देशित जगह से हटानी होगी।
20. सप्लाई अवधि/तादात कम या अधिक करने का अधिकार अधिष्ठाता पशु चिकित्सा और पशु विज्ञान महाविद्यालय, बीकानेर को होगा ।
21. जिस निविदादाता की दरें मंजूर होगी उस फर्म को नियमानुसार नॉन ज्यूडिसियल स्टाम्प पर स्वीकृति पत्र प्राप्ति के सात दिन के अन्दर अनुबंध करना होगा व साथ ही नियमानुसार **performance security** जमा करानी होगी अन्यथा बोली प्रतिभूति राशि जब्त करने की कार्यवाही की जायेगी ।
22. निर्बाध एकीकरण सुनिश्चित करने और संगतता संबंधी समस्याओं से बचने के लिये (Interactive Smart Display, Electric Podium,) एक ही मेक के होने चाहिए।
23. OEM का मेक इन इण्डिया निर्माता होना चाहिए/प्राथमिकता दी जायेगी। और OEM का मेक इन इण्डिया न होने पर उसका कारखाना भारत में स्थित होना चाहिए
24. निविदा पर खरीद किये जाने वाले Items (All In One PC, Interactive Smart Display, Electric Podium, Layer 2 Manageable Gigabit NON-POE Switch and Online UPS 6 KVA) की दर अनुकुल नहीं होने पर निगोशियसन द्वारा निश्चय किया जा सकता है । उस पर किसी फर्म को कोई एतराज नहीं होगा ।
25. उपरोक्त निविदा की दरें तीन माह तक मान्य होगी तथा आवश्यकतानुसार निविदादाता की सहमति से बढ़ाई जा सकेगी ।
26. सप्लाई केन्द्रीय भण्डार, सी.वी.ए.एस., बीकानेर होगा ।
27. फर्म का जीएसटी में पंजीकरण होने का प्रमाणपत्र, जीएसटी चालान/जीएसटी रिटर्न की छायाप्रति एवं आयकर पैन न. की छायाप्रति तकनिकी बिड के साथ प्रस्तुत करनी होगी।
28. अधिष्ठाता न्यूनतम दर वाली निविदा को स्वीकार करने के बाध्य नहीं है।
29. किसी तरह के वाद-विवाद का न्यायाधिक क्षेत्र बीकानेर होगा।

COLLEGE OF VETERINARY AND ANIMAL SCIENCE, BIKANER

30. सप्लाई विलंब से करने पर नियमानुसार परिनिर्धारित हानि की वसूली की जायेगी ।
31. निविदादाता द्वारा निविदा प्रपत्र विभाग की वेबसाइट www.rajivas.org एवं स्टेटपोर्टल की वेबसाइट www.sppp.raj.nic.in से दिनांक 20.03.2026 से 27.03.2026 को सुबह 11.00 बजे तक डाउनलोड कर सकते हैं तथा निविदा दिनांक 27.03.2026 को सुबह 11.30 बजे तक प्रस्तुत कर सकते हैं । निविदा शुल्क की राशि का डिमाण्ड ड्राफ्ट/नगद, बोली प्रतिभूती व फर्म पूर्व में कभी ब्लैक लिस्टेड घोषित नहीं की गई है एवं फर्म के विरुद्ध पूर्व में कभी पुलिस कार्यवाही नहीं की गई है, न ही माननीय न्यायालय द्वारा कभी दंडित किया गया है और न ही किसी प्रकार की कोई विजिलेंस जॉच लंबित है इस बाबत सौ रुपये कि स्टाम्प पर शपथ-पत्र नोटरी करवाकर, निविदा की सामान्य निविदा शर्तें व Annexure a to d, SR 11 एवं चाहे गये कागजात तकनीकी निविदा के साथ दिनांक 27.03.2026 को सुबह 11.30 बजे तक अधोहस्ताक्षर कार्यालय में जमा करानी होगी ।
32. बोली प्रतिभूति/ **performance security** पर कोई ब्याज देय नहीं होगा ।
33. उपरोक्त शर्तों के अलावा राजस्थान पशु चिकित्सा एवं पशु विज्ञान विश्वविद्यालय, बीकानेर की सामान्य निविदा शर्तें व आरटीपीपी एक्ट 2012 व नियम 2013 भी लागू होंगे ।
34. तकनीकी निविदा के साथ इस कार्यालय द्वारा जारी निविदा शर्तों के प्रत्येक पृष्ठ पर निविदादाता द्वारा हस्ताक्षर कर अन्तिम तिथि 27.03.2026 को सुबह 11.30 बजे तक प्रस्तुत करनी होगी ।
35. निविदा के संबंध में किसी भी प्रकार की जानकारी/स्पष्टीकरण निविदा प्रकाशन के 3 दिवस में किसी भी कार्य दिवस व कार्यालय समय पर अधोहस्ताक्षरकर्ता कार्यालय से प्राप्त की जा सकती हैं ।
36. अपिल अधिकारी—
1. प्रथम अपिल अधिकारी—कुलसचिव, राजुवास, बीकानेर ।
 2. द्वितीय अपिल अधिकारी—माननीय कुलपति, राजुवास, बीकानेर

अधिष्ठाता

नोट—मैंने/हमने निविदा की सभी शर्तें पढली है और समझली है और मैं/हम इस शर्तों पर पूर्ण रूप से सहमत है ।


निविदादाता के हस्ताक्षर मय मोहर

SR Form No. 16
(A) CONDITIONS OF BID AND CONTRACT FOR OPEN BID
(See Rule 68)

Note: Bidders should read these conditions carefully and comply strictly while sending/submitting their Bids.

- 1 Bids must be enclosed in a properly sealed envelope or uploaded on e-proc, according to the directions given in the Bid notice.
- 2 The Bidders shall be furnish a declaration in the **SR FORM 11**.
- 3 (i) Any change in the constitution of the firm etc. shall be notified forth with by the contractor in writing to the purchase office and such change shall not relieve any former member of the firm etc., From any liability under the contract.
(ii) No new partner/partners shall be accepted in the firm by the contractor in respect of the contract unless he/they agree to avoid by all its terms, conditions and deposit with the purchase officer a written agreement to this effect. The contractors receipt for acknowledgement or that of any partners subsequently accepted as above shall bind all of them will be sufficient discharge for any of the purpose of the contract.
- 4 **GST Registration and Clearance Certificate:** No dealer who is not registered under the GST Act prevalent in the State where his business is located shall Bid. The GST Registration Number should be quoted and a GST Clearance Certificate/GST Challan/GST Return shall be submitted without which the Bid is liable to rejection.
- 5 In case of offline, Bid forms shall be filled in ink or typed. No Bid filled in pencil shall be considered. The Bidder shall sign the Bid form at each page and at the end in token of acceptance of all the terms and conditions of the Bid.
- 6 Rates shall be mentioned both in words and figures. There should not be errors and/ or overwriting. Corrections if any, should be made clearly and initialed with dates. The rates should mentions element of the Rajasthan State GST and Central GST separately.
- 7 All rates quoted must be F.O.R. destination and should include all incidental charges except Central/Rajasthan GST Tax which should be shown separately.
- 8 The approved Supplier shall be deemed to have carefully examined the conditions, Specifications, size, make and drawings, etc., of the goods to be supplied. If he has any doubts as to the meaning of any portion of the these conditions or of the specifications, drawing etc., he shall, before signing the contract refer the same to the Purchase Officer and get clarifications.
- 9 The contractor shall not assign or sub-let his contract or any substantial part there, of to other agency.
- 10 **Inspection :-**
 - (a) The purchase officer or his duly authorized representative shall at all reasonable time have access to the suppliers premises and shall have the power at all reasonable time to inspect and examine the materials and workmanship of the goods/equipment/machineries during manufacturing process or after wards as may he decides.
 - (b) The Bidder shall furnish complete address of the premises of his office, go down and

Signature of the bidder with stamp



workshop where inspection can be made together with name and address of the person who is to be contacted for the purpose. In case of those who have newly entered in business, a letter of introduction from their banker will be necessary.

- 11 The contract for the supply can be repudiated at any time by the Purchase Officer, if the supplies are not made to his satisfaction after giving an opportunity to the Bidder of being heard and recording of the reasons for repudiation.
- 12 If the Purchase Officer does not purchase any of the Bided articles or purchase less than the quantity indicated in the Bid form, the Bidder shall not be entitled to claim any compensation.
 - (i) Remittance Charges on payment made shall be borne by the Bidder.
- 13 **Insurance:**

The successful bidder will be responsible for all kinds of claims (in case of accident, death etc. so the service providing person), if arises during contract period.
- 14 **Payments:**
 - i. Advance payment will not be made except in rare and special cases. In cases of advance payment being made, it will be against proof of dispatch and to the extent as prescribed in financial powers by rail/reputed goods transport companies, etc, and prior inspection, if any. The balance, if any will be paid on receipt of the consignment in good condition with the certificate to that effect endorsed on the inspection not given to the Bidder.
 - ii. Unless otherwise agreed between the parties payment for the delivery of the stores will be made on submission of bill in proper form by the Bidder to the Purchase Officer in accordance with GF & AR and all remittance changes will be borne by the Bidder.
 - iii. In case of disputed items, 10 to 25% of the amount shall be with - held and will be paid on settlement of the dispute.
 - iv. Payment in case of those goods which need testing shall be made only when such tests have been carried out, test results received conforming to the prescribed specification.
- 15 (i) The time specified for delivery in the Bid forms shall be deemed to be the essence of the contract and the successful Bidder shall arrange supplies within the period on receipt of the firm order from the Purchase Officer.
 - (ii) Liquidated damages : in case of extension in the delivery period with liquidated damages, the recovery shall be made on the basis of following percentages of value of store which the Bidder has failed to supply :

1 (a) Delay up to one fourth period of the prescribed delivery period.	2.5%
(b) Delay exceeding one fourth but not exceeding half of the prescribed delivery period.	5%
(c) Delay exceeding half but not exceeding three fourth of the prescribed delivery period.	7.5%
(d) Delay exceeding above three fourth of the prescribed delivery period.	10%
 - 2 Fraction of a day in reckoning period of delay in suppliers shall be eliminated if it less than half a day.
 - 3 The maximum amount of liquidated damages shall be 10% .
 - 4 If the suppliers require an extension of time in completion of contractual supply on account of Occurrence of any hindrance, he shall apply in writing to the authority which has placed the supply order, for the same immediately on occurrence of the hindrance but not after the stipulated date of completion of supply.
 - 5 Delivery Period may be extended with or without liquidated damages if the delays in the supply of goods are on account of hindrance beyond the control of the Bidder.
- 16 **Recoveries:** Recoveries of liquidated damages, short supply, breakage, rejected articles shall ordinary be made from bills. Amount may also be with-held to the extent of short

Signature of the bidder with stamp

supply, breakage, rejected articles and in case of failure in satisfactory replacement by the supplier along with amount of liquidated damages shall be recovered from his dues and security deposit available with the department. In case recovery is not possible, recourse will be taken under Rajasthan PDR Act or any other law in force.

- 17 If a Bidder imposes conditions which are in addition to or in conflict with the conditions mentioned herein, his Bid is liable to summary rejection. In any case none of such conditions will be deemed to have been accepted unless specifically mentioned in the letter of acceptance of Bid issued by the Purchase officer.
- 18 The Purchase Officer reserves the right to accept any Bid not necessarily the lowest, reject any Bid without assigning any reasons and accept Bid for all or anyone or more of the articles for which Bidder has been given or distribute items of stores to more than one firm/supplier.
- 19 The Bidder shall furnish the following documents at the time of execution of agreement: -
 - i. Attested copy of partnership deed in case of partnership firms.
 - ii Registration Number and year of registration in case partnership firm is registered with Registrar of firms.
 - iii Address of residence and office, telephone number in case of sole proprietorship.
 - iv Registration issued by the Registrar of Companies in case of company.
- 20 If any dispute arise out of the contract with regard to the interpretation, meaning and breach of the terms the contract, the matter shall be referred to by the parties to head of the Department who will appoint his senior most deputy as the Sole Arbitrator of the dispute who will not be related to this department contract and his decision shall be final.
- 21 All legal proceedings, if necessary arise to institute may be any of the parties (University / Department or Contractor) shall have to be lodged in courts situated in Rajasthan and not elsewhere.
- 22 **Interference with procurement process: -**
 - (1) **Whoever-**
 - a. Interferes with or influences any procurement process with the intention of securing any wrongful gain or undue advantage for any prospective bidder, or
 - b. Interferes with the procurement process with the intention of causing any unfair disadvantage for any prospective bidder, or
 - c. Engages in any action or lobbying, directly or indirectly, with the objective of unduly restriction fair competition, or
 - d. Intentionally influences any procuring entity or any officer or employee thereof or willfully or fraudulently makes any assertion or representation that would restrict or constrain fair competition in any procurement process, or
 - e. Engages a former officer or employee of a procuring entity as an employee, director, consultant, adviser or otherwise, within a period of one year after such former officer or employee was associated with a procurement in which the employer had an interest, or
 - f. Engages in any form of bid-rigging, collusive bidding or anticompetitive behavior in the procurement process, or
 - g. Intentionally breaches confidentially referred to in section 49 of the Act, for any undue gain, shall be punished with imprisonment for a term which may extend to five years

Signature of the bidder with stamp



and shall also be liable to fine which may extend to fifty lakh rupees or ten per cent or the assessed value of procurement, whichever is less.

(2) A bidder who-

- a. Withdraws from the procurement process after opening of financial bids.
- b. Withdraws from the procurement process after being declared the successful bidder.
- c. Fails to enter into procurement contract after being declared the successful bidder.
- d. Fails to provide performance security or any other document or security required in terms of the bidder documents after being declared the successful bidder, without valid grounds, shall in addition to the recourse available in the bidding documents or the contract be punished with fine which may extend to fifty lakh rupees or ten per cent of the assessed value of procurement whichever is less.

23 Vexatious appeals or complaints: - Whoever intentionally files any vexatious frivolous or malicious appeal or complaint under this Act, with the intention of delaying or defeating any procurement or causing loss to any procuring entity or any other bidder shall be punished with fine which may extend to twenty lakh rupees or five per cent of the value of procurement, whichever is less.

24 Offences by companies: -

- i. Where an offences under this Act has been committed by a company, every person who at time the offence was committed was in charge of and was responsible to the company for the conduct of the business of the company as well as the company, shall be deemed to be guilty of having committed the offence and shall be liable to be proceeded against and punished accordingly. Provided that nothing contained in this sub-section shall render any such person liable for any punishment if he proves that the offence was committed without his knowledge or that he had exercised all due diligence to prevent the commission of such offence.
- ii. Notwithstanding anything contained in sub-section (1), where as offence under this Act has been committed by a company and it is proved that the offence has been committed with the consent or connivance of or is attributable to any neglect on the part of any director, manager, secretary or other officer shall also be deemed to be guilty of having committed such offence and shall be liable to be proceeded against and punished accordingly.

Explanation: - For the purpose of this section-

- (i) "company" means a body corporate and includes a limited liability partnership, firm, registered society or co-operative society, trust or other association of individuals, and
- (ii) "Director" in relation to a limited liability partnership or firm, means a partner in the firm.

25 Abetment of certain offences: - Whoever abets an offence punishable under this Act, whether or not that offence is committed in consequence of that abetment, shall be punished with the punishment provided for the offence.

26 Debarment from bidding: -

- i. A bidder shall be debarred by the state Government if he has been convicted of offence-

Signature of the bidder with stamp



- (a) Under the prevention Corruption Act, 1988 (Central Act No. 49 of 1988), or
- (b) Under the Indian penal Code, 1860 (Central Act No. 45 of 1860) or any other law for the time being in force, for causing any loss of life or property or causing a threat to public health as part of execution of a public procurement contract.
- ii. A bidder debarred under sub-section (1) shall not be eligible to participate in a procurement process of any procuring entity for a period not exceeding three years commencing from the date on which he was debarred.
- iii. If a procuring entity finds that a bidder has breached the code of integrity prescribed in terms of section 11, it may debar the bidder for a period not exceeding three years.
- iv. where the entire bid security or the entire performance security or any substitute thereof, as the case may be, of a bidder has been forfeited by a procuring entity in respect of any procurement process or procurement contract, the bidder may be debarred from participating in any procurement process undertaken by the procuring entity for a period not exceeding three years.
- v. The State Government or a procuring entity, as the case may be, shall not debar a bidder under this section unless such bidder has been given a reasonable opportunity of being heard.

27 **Purchase Preference:-** 15% Purchase preference will be given to the goods produced or manufactured by small scale industries of Rajasthan over goods produced or manufactured by Industries outside Rajasthan as per Purchase of Stores (Preference to Industries of Rajasthan) Rules, 1995 and approved by Board. Purchase preference admissible to the PSUs of the state of Rajasthan and to the SSI of the state of Rajasthan together shall not exceed 25% (10% for PSUs and 15% of SSI units.) However these units will be required to participate in bidding process and match lowest price (L-1).

28 **Qualification of bidders:** - In addition to the provisions regarding qualification of bidders as set out in section 7 of the Act -

- (a) The procuring entity shall disqualify a bidder if it finds at any time that-
 - (i) The information submitted, concerning the qualifications of the bidders, was false or Constituted a misrepresentation ; or
 - (ii) The information submitted, concerning the qualification of the bidder, was Materially inaccurate or incomplete; and
- (b) The procuring entity may require a bidder, who was re-qualified, to demonstrate its qualifications again in accordance with the same criteria used to pre-qualify such bidder. The procurement entity shall disqualify any bidder that fails to demonstrate its qualifications again, if requested to do so. The procuring entity shall promptly notify each bidder requested to demonstrate its qualifications again as to whether or not the bidder has done so to the satisfaction of the procuring entity.

29 **Eligibility of Bidder:** -

- (1). A bidder may be a natural person, private entity, government-owned or, where permitted in the bidding documents, any combination of them with a formal intent to enter into an agreement or under an existing agreement in the form of a joint Venture. In case of a joint Venture: -

- (a) All parties to the joint venture shall sign the bid and they shall be jointly and severally liable; and.

- (b) A Joint Venture shall nominate a representative who shall have the authority to conduct all business for and on behalf of any or all the parties of the joint venture

Signature of the bidder with stamp

- during the bidding process. In the event the bid of Joint Venture is accepted, either they shall form a registered joint venture company/firm or otherwise all the parties to joint venture shall sign the Agreement.
- (2). A bidder should not have a conflict of interest in the procurement in question as stated in RTPP - 2013 rule 81 and the bidding documents. The procuring entity shall take appropriate action against the bidder in accordance with section 11 of the Act, and chapter IV of the Act, if it determines that a conflict of interest has flawed the integrity of any procurement process. All bidders found to have a conflict of interest shall be disqualified.
- (3). A bidder debarred under section 46 of Act, shall not be eligible to participate in any procurement process undertaken by:-
 (a) Procuring entity, if debarred by the state government; and
 (b) Any procuring entity, if debarred by such procuring entity.
- (4). In case of procurement of goods, **bidder must be a manufacturer, distributors or bona-fide dealer in the goods and it shall furnish necessary proof for the same** in the specified format. Where applicable, proof of authorization by the manufacture or country distributor in India, shall be enclosed.

30 Time frame for procurement process :-

- (1). The time frame for one stage bidding shall be as under :-
 Bid cycle of outer time frame for various procurement methods by one stage bidding

S.No	Stage of procurement	Procurement Method	
		Open competitive Bidding	Limited Bidding and Single source procurement
1	2	3	4
1	Issue of bidding documents	On the day of first publication of Notice Inviting Bids	
2	Submission of bids	(i) Thirty days, if estimated value of procurement is more than Rs. 50 crores and Twenty days, if the estimated value of procurement is upto Rs. 50 crores from the date of first publication of Notice Inviting Bids. (ii) Where clarifications/ addendum are issued, at least fifteen days, if estimated value of procurement is more than Rs. 50 crores and 10 days, if estimated value of procurement is upto Rs. 50 crores, from the date of issue of clarifications/ addendum. (iii) In case of International Competitive Bidding, the period of submission of bids shall be forty five days from the date of first publication of Notice Inviting Bids and at least twenty days from the date of issue of clarifications/addendum.	Seven days from issue of Bidding documents / date of issue of clarifications / addendum.
3	Technical bid opening	Within one day of last day of submission of bids.	Within one day of last day of submission of

Signature of the bidder with stamp

4	Issue of letter of award	Within three days of approval of award by the competent authority.	bids. Within three days of approval of award by the competent authority.
5	Execution of contract agreement	Within fifteen days of issue of letter of award or a period as specified in the bidding documents.	Within fifteen days of issue of letter of award or a period as specified in the bidding documents.
6	Declaration of the bid results on State Public Procurement Portal and Procuring entity's website, if any	Within three days of issue of letter of acceptance.	Within three days of issue of letter of acceptance.

Provided that, in appropriate cases, the procuring entity may, with the approval of the competent authority authorized by the State Government for the purpose, relax the above mentioned time frame of bid process

- (2). A decision on acceptance or rejection of bids invited in a procurement process must be taken by the competent sanctioning authority within the period as given below, even if the period of validity may be more, from the date of opening of technical bids where two envelope system is followed, otherwise from the date of opening of financial bids. If the decision is not taken within the given time period by the concerned sanctioning authority, reasons of not taking decision within the given time period shall be specifically recorded by the competent sanctioning authority while taking its decision.


Table
Time schedule for decision on the bids by the competent authority

S. No.	Authority competent to take decision	Time allowed for decision
1	2	3
1	Head of Office or Executive Engineer	Twenty days
2	Regional Officer or Superintending Engineer	Thirty Days
3	Head of the Department or Chief Engineer/Additional Chief Engineer	Forty days
4	Administrative Department concerned/ Finance Committee/ Board/ Empowered Committee/ Empowered Board, etc.	Fifty days

- Note:** (1) The period specified above shall be inclusive of time taken in communication of acceptance of bid.
(2) If procuring entity is other than the departments of the State Government or its attached or subordinate offices, the concerned administrative department shall specify the equivalent authority competent to take decision on the bid.

Conditions according to provisions of the Rajasthan Transparency Public Procurement Act, 2012 and Rules 2013.


Signature of the bidder with stamp



31 Bid Security :-

- (1). In case of open competitive bidding, two - stage bidding, rate contract, electronic reverse auction, bid security shall be 2% or as specified by the University of the estimated value of subject matter of procurement put to bid. In case of Small Scale Industries of Rajasthan, it shall be 0.5% of the quantities offered for supply and in cases of sick industries, other than small scale industries whose case are pending with Board of Industrial and Financial Reconstruction; it shall be 1% of the value of bid. Concessional bid security may be taken from registered bidders as specified by the State Government. Every bidder, if not exempted, participating in the procurement process shall be required to furnish the bid security as specified in the notice inviting bid. The bidder will have to submit the certificate issued by respective department for availing relaxation in bid security.
- (2). In lieu of bid security, a bid securing declaration shall be taken from Departments of the State Government and Undertakings, Corporations, Autonomous bodies, Registered Societies, Cooperative Societies which are owned or controlled or managed by the state Government and Government undertakings of the Central Government.
- (3). Bid security instrument of a bid securing declaration shall necessarily accompany the sealed bid.
- (4). Bid Security of a bidder lying with the procuring entity in respect of other bids awaiting decision shall not be adjusted towards bid security for the fresh bids. The bid security originally deposited may, however, be taken into consideration in case bids are re-invited.
- (5). The bid security may be given in the form of a banker's cheque or demand draft or bank guarantee, in specified format, of a scheduled bank. **The bid security must remain valid thirty days beyond the original or extended validity period of the bid.**
- (6). The bidding documents may stipulate that the issuer of the security and the confirmer, if any, of the bid security, as well as the form and terms of the bid security, must be acceptable to the procuring entity. In cases of International Competitive Bidding, the bidding documents may in addition stipulate that the bid security shall be issued by an issuer in India.
- (7). Prior to presenting a submission, a bidder may request the procuring entity to confirm the acceptability of proposed issuer of a bid security or of a proposed confirmer, if required. The procuring entity shall respond promptly to such a request.
- (8). The Bank guarantee presented as bid security shall be got confirmed from the concerned issuing bank. However, the confirmation of the acceptability of a proposed issuer or of any proposed confirmer does not preclude the procuring entity from rejecting the bid security on the ground that the issuer or the confirmer, as the case may be, has become insolvent or has otherwise ceased to be creditworthy.
- (9). The bid security of unsuccessful bidders shall be refunded soon after final acceptance of successful bid and signing of Agreement and submitting performance security.
- (10). The bid security taken from a bidder shall be forfeited in the followings cases, namely: -
 - a) When the bidder withdraws or modifies its bid after opening of bids.
 - b) When the bidder does not execute the agreement, if any, after placement of supply / work order within the specified period.
 - c) When the bidder fails to commence the supply of the goods or service or execute work as per supply / work order within the time specified.
 - d) When the bidder does not deposit the performance security within specified period after the supply / work order is placed, and.
 - e) If the bidder breaches any provision of code of integrity prescribed for bidders specified in the Act and Chapter VI of these rules.
- (11). In case of the successful bidder, the amount of bid security may be adjusted in arriving at the amount of the Performance Security, or refunded if the successful bidder furnishes the full amount of performance security.
- (12). The procuring entity shall promptly return the bid security after the earliest of the following events, namely:-
 - a) The expiry of validity of bid security.

Signature of the bidder with stamp

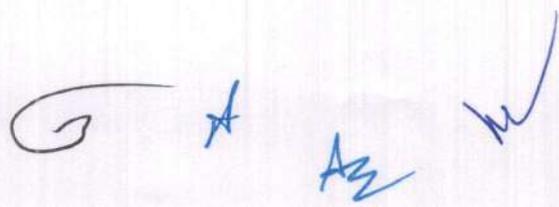

- b) The execution of agreement for procurement and performance security is furnished by the successful bidder.
- c) The cancellation of the procurement process, or
- d) The withdrawal of bid prior to the deadline for presenting bids, unless the bidding documents stipulate that no such withdrawal is permitted.

32 Sale of Bidding documents: - Bidding documents purchased by Principal of any concern may be used by its authorized sole selling agents/marketing agents/distributors/sub-distributors and authorized dealers or vice versa.

33 Validity: Bids shall remain valid for a period of 3 months from the date of opening of Bid. A bid valid for shorter period shall be rejected as non responsive.

34 Format and signing of bids:-


1. The bidder shall prepare one original set of the bidding documents called Bid and clearly mark it as "ORIGINAL" and if asked, the bidder shall submit additional copies of the bid in such number as specified in the bidding documents and clearly mark them as "COPY". In the event of any discrepancy between the original bid and its copies, the contents of the original bid shall prevail.
2. The original and all copies of the bid shall be typed or written in ink **and its all the pages shall be signed by the bidder or a person duly authorized to sign on behalf of the bidder**, in token of acceptance of all the terms and conditions of the bidding documents. This authorization shall consist of a written confirmation as specified in the bidding documents and shall be attached to the bid.
3. Any corrections in the bid such as interlineations, erasures, or overwriting shall be valid only if they are signed or initialed by the person signing the bid.
4. Similar procedure for signing of bids shall be adopted for Technical and Financial bids, if two part bids have been invited.

35 Sealing and marking of bids:-

- (1). Bidders may submit their bids by post or by hand but if so specified in the bidding documents, bidders shall submit their bids only electronically. **Bidders submitting bids electronically shall follow the electronic bid submission procedure as specified on the State Public Procurement Portal.**
- (2). Bids submitted by post or by hand shall enclose the original and each copy of the bid in separate sealed envelopes duly marked envelopes as "ORIGINAL" and "COPY". The envelopes containing the original and the copies shall then be enclosed in one single envelope.
- (3). The inner and outer envelopes shall:-
 - a. bear the name and complete address along with telephone/mobile number of bidder
 - b. bear complete address of the procuring entity with telephone numbers, if any
 - c. bear the specific identification of the bidding process pursuant to Notice Inviting Bids and any additional Identification marks as specified in the bidding documents, and.
 - d. Bear a warning not to be opened before the time and date for bid opening in accordance with the Notice Inviting Bids.
- (4). If all envelopes are not sealed and marked as required, the procuring entity shall assume no responsibility about its consequences.
- (5). Similar procedure for sealing and making of bids shall be adopted for Technical and Financial bids, if two part bids have been invited.

36 Late Bids:- The person authorized to receive the bids shall not receive any bid that it submitted personally, after the time and date fixed for submission of bids. Any bid which

Signature of the bidder with stamp

Handwritten signature in blue ink, followed by a blue ink stamp or mark.

arrives by post after the deadline for submission of bids shall be declared and marked as "Late" and returned unopened to the bidder by registered post.

37 Withdrawal, substitution and modification of bids:-

- 1 A bidder may withdraw, substitute, or modify its bid after it has been submitted by sending a written notice, duly signed by him or his authorized representative (authorization letter be enclosed). Corresponding substitution or modification of the bid must accompany the written notice. The notice must be
 - (a) submitted in accordance with the bidding documents and in addition the envelope shall be clearly marked as "**Withdrawal**", "**Substitution**", or "**Modification**", and
 - (b) Received by the person authorized to receive the bids or directly dropped in the bid box prior to the last time and date fixed for receiving of bids.
- 2 Bids, requested to be withdrawn shall be returned unopened to the bidders.
- 3 **No bid shall be withdrawn, substituted, or modified after the last time and date fixed for receipt of bids.**

38 Opening of Bids:-

- (1) The sealed bid box shall be opened by the bid opening committee constituted by the procuring entity at the time, date and place specified in the bidding documents in the presence of the bidders or their authorized representatives, who choose to be present.
- (2) If electronic bidding is adopted, specific electronic bid opening procedure as specified on the State Public Procurement Portal Shall be followed. The bidders may witness the electronic bid opening procedure online.
- (3) The bids shall be opened by the bids opening committee in the presence of the bidders or their authorized representatives who choose to be present. **All envelopes containing bids shall be signed with date by the members of the committee in loken of verification of the fact** that they are sealed. The envelopes shall be numbered as a/n where 'a' denotes the serial number at which the bid envelop has been taken for opening and 'n' denotes the total number of bids received by specified time.
- (4) The bid opening committee shall prepare a list of the bidders or their representatives attending the opening of bids and obtain their signatures on the same. The list shall also contain the representative's name and telephone number and corresponding bidder's names and addresses. The authority letters brought by the representatives shall be attached to the list. The list shall be signed by all the members of bid opening committee with date and time of opening of the bids.
- (5) First, envelopes marked as "WITHDRAWAL" shall be opened, read out, and recorded and the envelope containing the corresponding bid shall not be opened but returned to the bidders. No bid shall be permitted to be withdrawn unless the corresponding withdrawal notice contains a valid authorization to request the withdrawal notice is not accompanied by the valid authorization the withdrawal shall not be permitted to be withdrawn unless the corresponding bid shall be opened. Next envelopes marked as "SUBSTITUTION" shall be opened, read out recorded and exchanged for the corresponding bid being substituted and the substituted bid shall not be opened, but returned to the bidder. No bid shall be substituted unless the corresponding substitution notice contains a valid authorization to request the substitution notice contains a valid authorization to request the submission and is read out and recorded at bid opening. Envelopes marked as "MODIFICATION" shall be opened there after read out and recorded with the corresponding bid. No bid shall be modified unless the corresponding modification notice contains a valid authorization to request the modification notice contains a valid authorization to request the modification and is read out and recorded at bid opening. Only envelopes that are opened, read out and recorded at bid opening shall be considered further.

Signature of the bidder with stamp



- (6) All other envelopes shall be opened one at a time and the following details shall be read out and recorded.
- The name of the bidder and whether there is a substitution or modification.
 - The bid prices (per lot if applicable).
 - The bid security, if required and.
 - Any other details as the committee may consider appropriate.

After all the bids have been opened, they shall be initialed and dated on the first page of the each bid by the members of the bids opening committee. All the pages of the price schedule and letters, Bill of Quantities attached shall be initialed and dated by the members of the committee. **Key information such as prices, delivery period etc. shall be encircled and unfilled spaces in the bids shall be marked and signed with date by the members of the committee.** The original and additional copies of the bid shall be marked accordingly.

Alterations/corrections/additions/over-writing shall be initialed legible to make it clear that such alteration, etc were existing in the bid at the time of opening.


- No bid shall be rejected at the time of bid opening except the late bids, alternative bids (if not permitted) and bids not accompanied with the proof of payment or instrument to the required price of bidding documents, processing fee or user charges and bid security.
- The bid opening committee shall prepare a record of the bid opening that shall include the name of the bidder and whether there is a withdrawal, substitution, or modification the bid price per lot (if applicable) any discounts and alternative offers (if they were permitted), any conditions put by bidder and the proof of the payment of price of bidding documents, processing fee or user charges and bid security. The bidders or their representatives, who are present, shall sign the record with date.
- In case of two part bids, only outer envelopes and envelopes marked as "technical Bid" shall be opened in the sequence of the serial numbers marked on them. The envelopes marked as "Financial Bid" shall be kept intact and safe and shall be opened of only those bidders who qualify in the evolution of their Technical Bids on the date and time to be intimated to those bidders.
- In case of two stage bidding the proposals received in response to invitation of Expression of Interest or Request for Qualification in the first stage shall be opened as per the procedure specified for the opening of Single part bid the procedure for opening of second stage bids shall be similar to that for opening of Two part bids. In case Technical and Financial bids are invited in single envelope in second stage, the procedure for opening of the bids shall be as specified above.

39 Non-material Non-conformities in bids-

- The bid evaluation committee **may waive any nonconformity in the bid that do not constitute a material deviation, reservation or omission, the bid shall be deemed to be substantially responsive.**
- The bid evaluation committee may request the bidder to submit the necessary information or document like audited statement of accounts, VAT / GST clearance certificate, PAN, etc. within a reasonable period of time. Failure of the bidder to comply with the request may result in the rejection of its bid.
- The bid evaluation committee may rectify non-material nonconformities or omissions on the basis of the information or documentation received from the bidder under sub-rule (2).

40 Correction of arithmetical errors

Signature of the bidder with stamp



The bid evaluation committee shall correct Arithmetical errors in substantially responsive bids on the following basis namely:-

- a. If there is a discrepancy between the unit price and the total price that is obtained by multiplying the unit price and quantity, the unit price shall prevail and the total price shall be corrected, unless in the opinion of the bid evaluation committee there is an obvious misplacement of the decimal point in the unit price, in which case the total price as quoted shall govern and the unit price shall be corrected.
- b. If there is an error in a total corresponding to the addition or subtraction of subtotals, the subtotals shall prevail and the total shall be corrected, and.
- c. If there is a discrepancy between words and figures, the amount in words shall prevail, unless the amount expressed in words is related to an arithmetic error, in which case the amount in figures shall prevail subject to (a) and (b) above. If the bidder that submitted the lowest evaluated bid does not accept the correction of errors, its bid shall be disqualified and its bid security shall be forfeited or its bid securing declaration shall be executed.

41 **(1) Comparison of rates of firms outside and those in Rajasthan:** - While tabulating the bids of those firms which are not entitled to price preference, the element of Rajasthan GST Tax shall be excluded from the rates quoted by the firm of Rajasthan and the element of Central GST / IGST Tax shall be included in the rates of firms from outside Rajasthan for evaluation purpose.

(2) While comparing the rates in respect of firms within Rajasthan the element of GST shall be included.

42 **Price Preference:** -

Price and / or purchase Preference notified by the State Government and as mentioned in the bidding documents shall be considered in the evaluation of bids and award of contract.


43 **Procuring entity's right to accept or reject any or all bids:-** The Procuring entity reserves the right to accept or reject any bid, and to annul the bidding process and reject all bids at any time prior to award of contract, without thereby incurring any liability to the bidders. **Reasons for doing so shall be recorded in writing.**

44 **Right to vary quantity :-**

- 1) If the procuring entity does not procure any subject matter of procurement or procures less than the quantity specified in the bidding documents due to change in circumstances, the bidder shall not be entitled for any claim or compensation except otherwise provided in the bidding documents.
- 2) Repeat orders for extra items or additional quantities may be placed, if it is provided in the bidding documents, on the rates and conditions given in the contract if the original order was given after inviting open competitive bids. Delivery or completion period may also be proportionately increased. the limits of repeat order shall be as under -
 - a. 50% of the quantity of the individual items and 50% of the value of original contract in case of work; and
 - b. 50% of the value of goods or services of the original contract.

45 **Performance Security :-**

Signature of the bidder with stamp

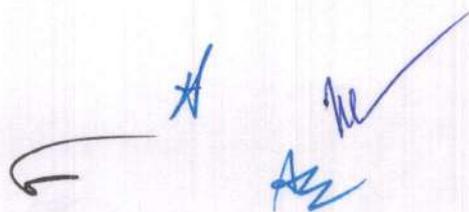

- i. Performance security shall be solicited from all successful bidders except the department's of the State Government and undertaking, corporation, autonomous bodies, registered societies, co-operative societies which are owned or controlled or managed by the State Government and undertakings of the Central Government. However, a performance security declaration shall be taken from them. The State Government may relax the provision of performance security in particular procurement or any class of procurement.
- ii. The amount of performance security shall be **5% (five percent), or as may be specified in the bidding documents**, of the amount of supply order in case of procurement of goods and services and **10% (Ten percent) of the amount of work order in case of procurement of works**. In case of **small scale Industries of Rajasthan it shall be 1% (One percent) of the amount of quantity ordered** for supply of goods and **in case of sick industries, other than small scale Industries**, whose cases are pending before the Board of Industrial and Financial Reconstruction (BIFR), **it shall be 2% (Two percent) of the amount** of supply order.
- iii. Performance security shall be furnished in any one of the following forms: -
 - (a) Bank Draft or Banker's Cheque of a scheduled bank.
 - (b) NEFT & RTGS.
- vi. Performance security furnished in the form specified in clause a-b of sub-rules (3) shall **remain valid for a period of sixty days beyond the date of completion of all contractual obligations** of the bidder, including warranty obligations and maintenance and defect liability period.

46 (A) Compliance with the code of Integrity

Any person participating in a procurements process shall:-

- (i) Not offer any bribe, reward or gift or any material benefit either directly or indirectly in exchange for an unfair advantage in procurement process to otherwise influence the procurement process.
- (ii) Not misrepresent or omit that misleads or attempts to mislead so as to obtain a financial or other benefit or avoid an obligation.
- (iii) Not indulge in any collusion, Bid rigging or anti-competitive behavior to impair he transparency, fairness and progress of the procurement process.
- (iv) Not misuse any information shared between the procuring entity and the bidders with intent to gain unfair advantage in the procurement process.
- (v) Not indulge in any coercion including impairing or harming or threatening to do the same, directly or indirectly, to any party or to its property to influence the procurement process.
- (vi) Not obstruct any investigation or audit of a procurement process.
- (vii) Disclose conflict of interest, if any, and.
- (viii) Disclose any previous transgression with any entity in India or any other country during the last three years or any debarment by any other procuring entity.

(B) Compliance with No Conflict of Interest:-

- a) A conflict of interest for procuring entity or its personnel and bidders is considered to be a situation in which a party has interests that could improperly influence that party's performance of official duties or responsibilities, contractual obligations, or compliance with applicable laws and regulations.
- b) The situations in which a procuring entity or its personnel may be considered to be in conflict of interest includes, but not limited to, following:-

Signature of the bidder with stamp




- i. A conflict of interest occurs when procuring entity's personnel private interests, such as outside professional or other relationships or personal financial assets, interfere or appear to interfere with the proper performance of its professional functions or obligations as a procurement official.
 - ii. Within the procurement environment, a conflict of interest may arise in connection with such private interests as personal investments and assets political or other outside activities and affiliations while in the service of the procuring entity, employment after retirement from the procuring entity's service of the receipt of a gift that may place the procuring entity's personnel in a position of obligation.
 - iii. A conflict of interest also includes the use of procuring entity's assets, including human, financial and material assets, or the use of procuring entity's office or knowledge gained from official functions for private gain or to prejudice the position of someone procuring entity's personnel does not favour.
 - iv. A conflict of interest may also arise in situations where procuring entity's personnel is seen to benefit, directly or indirectly, or allow a third party, including family friends or someone they favour to benefit from procuring entity's personnel's actions or decisions.
- A Bidder may be considered to be in conflict of interest with one or more parties in a bidding process if, including but not limited to:-
- a) They have controlling partners in common.
 - b) They received or have received any direct or indirect subsidy from any of them.
 - c) They have the same legal representative for purpose of the bid.
 - d) They have a relationship with each other, directly or through common third parties, that puts them in a position to have access to information about or influence on the bid or another.
 - e) A bidder participates in more than one bid in the same bidding process. However, this does not limit the inclusion to the same sub-contractor, not otherwise participating as a bidder, in more than one bid, or
 - f) A bidder or any of its affiliates participated as a consultant in the preparation of the design or technical specifications of the subject matter of procurement of the bidding process. All bidders shall provide in Qualification Criteria and Bidding Forms, a statement that the bidder is neither associated nor has been associated directly or indirectly, with the consultant or any other entity that has prepared the design, specifications and other documents for the subject matter of procurement or being proposed as Project Manager for the contract.

47 The prices under a rate contract shall be subject to price fall clause. If the rate contract holder quotes/reduces its price to render similar goods, works or services at a price lower than the rate contract price to anyone in the State at any time during the currency of the rate contract, the rate contract price shall be automatically reduced with effect from the date of reducing or quoting lower price, for all delivery of the subject matter of procurement under that rate contract and the rate contract shall be amended accordingly. The firms holding parallel rate contracts shall also be given opportunity to reduce their price by notifying them the reduced price giving them fifteen days time to intimate their acceptance to the revised price. Similarly if a parallel rate contract holding firm reduces its price during currency of the rate contract, its reduced price shall be conveyed to other parallel rate contract holding firm and the original rate contract holding firm for corresponding reduction in their prices. If any rate contract holding firm does not agree to the reduced price, further transaction with it, shall not be conducted.

Signature of the bidder with stamp

- 48 Bids received by telegram/e-mail or given on form other than the prescribed form shall not be considered.
- 49 **Breach of code of integrity by the bidder:** - without prejudice to the provision of Chapter IV of the Act, in case of breach of any provision of the code of integrity by a bidder or prospective bidder, as the case may be, the procuring entity may take appropriate action in accordance with the provisions of sub-section (3) of section 11 and section 46.
- 50 Appealing Authority :-
- (i) First Appealing Authority: - Registrar, Rajasthan University of Veterinary and Animal Sciences, Bikaner.
- (ii) Second Appealing Authority: - Hon'ble Vice – Chancellor, Rajasthan University of Veterinary and Animal Sciences, Bikaner.
- 51 All legal proceedings, if necessary arise to institute may by any of the parties (University or Contractor) shall have to be lodged in courts situated in Bikaner Rajasthan and not elsewhere.



DEAN

Signature of the bidder with stamp



Annexure A : Compliance with the Code of Integrity and No Conflict of Interest

Any person participating in a procurement process shall –

- (a) not offer any bribe, reward or gift or any material benefit either directly or indirectly in exchange for an unfair advantage in procurement process or to otherwise influence the procurement process;
- (b) not misrepresent or omit that misleads or attempts to mislead so as to obtain a financial or other benefit or avoid an obligation;
- (c) not indulge in any collusion, Bid rigging or anti-competitive behaviour to Impair the transparency, fairness and progress of the procurement process;
- (d) not misuse any information shared between the procuring Entity and the Bidders with an intent to gain unfair advantage in the procurement process;
- (e) not indulge in any coercion including impairing or harming or threatening to do the same, directly or indirectly, to any party or to its property to influence the procurement process;
- (f) not obstruct any investigation or audit of a procurement process;
- (g) disclose conflict of interest, if any; and
- (h) disclose any previous transgressions with any Entity in India or any other country during the last three years or any debarment by any other procuring entity.

Conflict of Interest:-

The Bidder participating in a bidding process must not have a Conflict of Interest.

A Conflict of Interest is considered to be a situation in which a party has interests that could improperly influence that party's performance of official duties or responsibilities, contractual obligations, or compliance with applicable laws and regulations.


- i. A Bidder may be considered to be in Conflict of Interest with one or more parties in a bidding process if, including but not limited to:
 - a. have controlling partners/ shareholders in common; or
 - b. receive or have received any direct or indirect subsidy from any of them; or
 - c. have the same legal representative for purposes of the Bid; or
 - d. have a relationship with each other, directly or through common third parties, that puts them in a position to have access to information about or influence on the Bid of another Bidder, or influence the decisions of the Procuring Entity regarding the bidding process; or
 - e. the Bidder participates in more than one Bid in a bidding process.

Participation by a Bidder in more than one Bid will result in the disqualification of all Bids in which the Bidder is involved. However, this does not limit the inclusion of the same subcontractor, not otherwise participating as a Bidder, in more than one Bid; or

- f. the Bidder or any of its affiliates participated as a consultant in the preparation of the design or technical specifications of the Goods, Works or Services that are the subject of the Bid; or
- g. Bidder or any of its affiliates has been hired (or is proposed to be hired) by the Procuring Entity as engineer-in-charge/ consultant for the contract.

Date:
Place:

Signature of bidder
Name :
Designation:
Address:

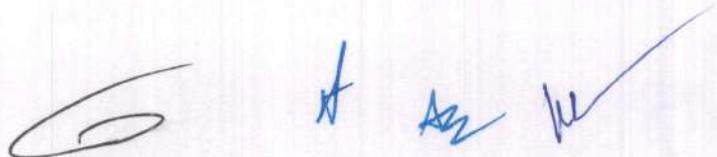Handwritten signatures in blue ink at the bottom of the page. There are four distinct signatures, including a large stylized one on the left and three smaller ones to its right.

Annexure B : Declaration by the Bidder regarding Qualifications
Declaration by the Bidder

In relation to my/our Bid submitted to for procurement
of in response to their Notice Inviting
Bids No..... Dated..... I/we
.....hereby declare under
Section 7 of Rajasthan Transparency in Public Procurement Act, 2012, that:

1. I/we possess the necessary professional, technical, financial and managerial resources and competence required by the Bidding Document issued by the Procuring Entity;
2. I/we have fulfilled my/our obligation to pay such of the taxes payable to the Union and the State Government or any local authority as specified in the Bidding Document;
3. I/we are not insolvent, in receivership, bankrupt or being wound up, not have my/our affairs administered by a court or a judicial officer, not have my/our business activities suspended and not the subject of legal proceedings for any of the foregoing reasons;
4. I/we do not have, and our directors and officers not have, been convicted of any criminal offence related to my/our professional conduct or the making of false statements or misrepresentations as to my/our qualifications to enter into a procurement contract within a period of three years preceding the commencement of this procurement process, or not have been otherwise disqualified pursuant to debarment proceedings;
5. I/we do not have a conflict of interest as specified in the Act, Rules and the Bidding Document, which materially affects fair competition;

Date:
Place:

Signature of bidder
Name :
Designation:
Address:

G

A

Az

✓

Annexure C : Grievance Redressal during Procurement Process

The designation and address of the First Appellate Authority is
The Registrar, RAJUVAS, Bikaner

The designation and address of the Second Appellate Authority is
The Hon'ble Vice- Chancellor, RAJUVAS, Bikaner

(1) Filing an appeal

If any Bidder or prospective bidder is aggrieved that any decision, action or omission of the Procuring Entity is in contravention to the provisions of the Act or the Rules or the Guidelines issued there under, he may file an appeal to First Appellate Authority, as specified in the Bidding Document within a period of ten days from the date of such decision or action, omission, as the case may be, clearly giving the specific ground or grounds on which he feels aggrieved:

Provided that after the declaration of a Bidder as successful the appeal may be filed only by a Bidder who has participated in procurement proceedings:


Provided further that in case a Procuring Entity evaluates the Technical Bids before the opening of the Financial Bids, an appeal related to the matter of Financial Bids may be filed only by a Bidder whose Technical Bid is found to be acceptable.

(2) The officer to whom an appeal is filed under para (1) shall deal with the appeal as expeditiously as possible and shall endeavour to dispose it of within thirty days from the date of the appeal.

(3) If the officer designated under para (1) fails to dispose of the appeal filed within the period specified in para (2), or if the Bidder or prospective bidder or the Procuring Entity is aggrieved by the order passed by the First Appellate Authority, the Bidder or prospective bidder or the Procuring Entity, as the case may be, may file a second appeal to Second Appellate Authority specified in the Bidding Document in this behalf within fifteen days from the expiry of the period specified in para (2) or of the date of receipt of the order passed by the First Appellate Authority, as the case may be.

(4) Appeal not to lie in certain cases

No appeal shall lie against any decision of the Procuring Entity relating to the following matters, namely:-

- (a) determination of need of procurement;
 - (b) provisions limiting participation of Bidders in the Bid process;
 - (c) the decision of whether or not to enter into negotiations;
 - (d) cancellation of a procurement process;
 - (e) applicability of the provisions of confidentiality.
- 

(5) Form of Appeal

- (a) An appeal under para (1) or (3) above shall be in the annexed Form along with as many copies as there are respondents in the appeal.
- (b) Every appeal shall be accompanied by an order appealed against, if any, affidavit verifying the facts stated in the appeal and proof of payment of fee.
- (c) Every appeal may be presented to First Appellate Authority or Second Appellate Authority, as the case may be, in person or through registered post or authorised representative.

(6) Fee for filing appeal

- (a) Fee for first appeal shall be rupees two thousand five hundred and for second appeal shall be rupees ten thousand, which shall be non-refundable.
- (b) The fee shall be paid in the form of bank demand draft or banker's cheque of a Scheduled Bank in India payable in the name of The Comptroller, RAJUVAS, Bikaner .


(7) Procedure for disposal of appeal

- (a) The First Appellate Authority or Second Appellate Authority, as the case may be, upon filing of appeal, shall issue notice accompanied by copy of appeal, affidavit and documents, if any, to the respondents and fix date of hearing.
- (b) On the date fixed for hearing, the First Appellate Authority or Second Appellate Authority, as the case may be, shall,-
- (i) hear all the parties to appeal present before him; and
- (ii) peruse or inspect documents, relevant records or copies thereof relating to the matter.
- (c) After hearing the parties, perusal or inspection of documents and relevant records or copies thereof relating to the matter, the Appellate Authority concerned shall pass an order in writing and provide the copy of order to the parties to appeal free of cost.
- (d) The order passed under sub-clause (c) above shall also be placed on the State Public Procurement Portal.

Date:

Place:

Signature of bidder
Name :
Designation:
Address:

FORM No. 1

[See rule 83]

Memorandum of Appeal under the Rajasthan Transparency in Public Procurement Act, 2012

Appeal Noof

Before the (First / Second Appellate Authority)

1. Particulars of appellant:

(i) Name of the appellant:

(ii) Official address, if any:

(iii) Residential address:

2. Name and address of the respondent(s):

(i)

(ii)

(iii)

3. Number and date of the order appealed against

and name and designation of the officer / authority

who passed the order (enclose copy), or a

statement of a decision, action or omission of

the Procuring Entity in contravention to the provisions

of the Act by which the appellant is aggrieved:

4. If the Appellant proposes to be represented

by a representative, the name and postal address

of the representative:

5. Number of affidavits and documents enclosed with the appeal:

6. Grounds of appeal:

.....
(Supported by an affidavit)

7. Prayer:

Place

Date

Appellant's Signature

G

Annexure D : Additional Conditions of Contract

1. Correction of arithmetical errors

Provided that a Financial Bid is substantially responsive, the Procuring Entity will correct arithmetical errors during evaluation of Financial Bids on the following basis:

- i. if there is a discrepancy between the unit price and the total price that is obtained by multiplying the unit price and quantity, the unit price shall prevail and the total price shall be corrected, unless in the opinion of the Procuring Entity there is an obvious misplacement of the decimal point in the unit price, in which case the total price as quoted shall govern and the unit price shall be corrected;
- ii. if there is an error in a total corresponding to the addition or subtraction of subtotals, the subtotals shall prevail and the total shall be corrected; and
- iii. if there is a discrepancy between words and figures, the amount in words shall prevail, unless the amount expressed in words is related to an arithmetic error, in which case the amount in figures shall prevail subject to (i) and (ii) above.

If the Bidder that submitted the lowest evaluated Bid does not accept the correction of errors, its Bid shall be disqualified and its Bid Security shall be forfeited or its Bid Securing Declaration shall be executed.

2. Procuring Entity's Right to Vary Quantities

- (i) At the time of award of contract, the quantity of Goods, works or services originally specified in the Bidding Document may be increased or decreased by a specified percentage, but such increase or decrease shall not exceed twenty percent, of the quantity specified in the Bidding Document. It shall be without any change in the unit prices or other terms and conditions of the Bid and the conditions of contract.
- (ii) If the Procuring Entity does not procure any subject matter of procurement or procures less than the quantity specified in the Bidding Document due to change in circumstances, the Bidder shall not be entitled for any claim or compensation except otherwise provided in the Conditions of Contract.
- (iii) In case of procurement of Goods or services, additional quantity may be procured by placing a repeat order on the rates and conditions of the original order. However, the additional quantity shall not be more than 25% of the value of Goods of the original contract and shall be within one month from the date of expiry of last supply. If the Supplier fails to do so, the Procuring Entity shall be free to arrange for the balance


supply by limited Bidding or otherwise and the extra cost incurred shall be recovered from the Supplier.

**3. Dividing quantities among more than one Bidder at the time of award
(In case of procurement of Goods)**

As a general rule all the quantities of the subject matter of procurement shall be procured from the Bidder, whose Bid is accepted. However, when it is considered that the quantity of the subject matter of procurement to be procured is very large and it may not be in the capacity of the Bidder, whose Bid is accepted, to deliver the entire quantity or when it is considered that the subject matter of procurement to be procured is of critical and vital nature, in such cases, the quantity may be divided between the Bidder, whose Bid is accepted and the second lowest Bidder or even more Bidders in that order, in a fair, transparent and equitable manner at the rates of the Bidder, whose Bid is accepted.

Date:
Place:

Signature of bidder
Name :
Designation:
Address:

(on NJS Rs. 100/- dully attested by Notary)

शपथ पत्र

मै/हम.....निवासी.....

.....फर्म मैसर्स के प्रोपराईटर/पार्टनर है,
जो कि शपथ पूर्वक घोषणा करता हूँ कि:-

1. यह है कि मै/हम उक्त पत्ते के मूल निवासी है ।
2. मेरी/हमारी फर्म /संस्था किसी भी विभाग राजकीय/सार्वजनिक विभाग/उपक्रम से काली सूची में नहीं है ।
3. मेरी/हमारी फर्म /संस्था के विरुद्ध पूर्व में कभी पुलिस कार्यवाही नहीं की गई है और न ही माननीय न्यायालय द्वारा कभी दंडित किया गया है और न ही किसी प्रकार की कोई विजिलेंस जाँच लम्बित है ।
4. मेरी/हमारी फर्म के विरुद्ध कोई राजकीय बकाया नहीं है तथा मेरी फर्म/संस्था निविदा की शर्तों का पूर्णतया पालन करेगी ।
5. मेरी /हमारी फर्म द्वारा नियमों व शर्तों के उल्लंघन करने पर मेरी/हमारी फर्म पेनल्टी की भागी होगी ।

दिनांक:-

निविदादाता के हस्ताक्षर मय सील

6 # 1 No -

SR FORM-11 DECLARATION BY TENDERERS
[See Rule 48 (vii)]

Annexure

I/We declare that I am/we are bonafide/Manufacturers/Whole Sellers/Sole distributor/ Authorised dealer/dealers/sole selling/Marketing agent in the goods/stores/equipments for which I/We have tendered. If this declaration is found to be incorrect then without prejudice to any other action that may be taken, my/our security may be forfeited in full and the tender if any to the extent accepted may be cancelled.

Signature of the tenderer

6
H
A-1

Form of Bid Securing Declaration

Date
Bid No.
Alternative No.
To:

We, the undersigned, declare that:

We understand that, according to your conditions, bids must be supported by a Bid-Securing Declaration. We accept that we are required to pay the bid security amount specified in the Term and Condition of Bid, in the following cases, namely:

- a) when we withdraw or modify our bid after opening of bids;
- b) when we do not execute the agreement, if any, after placement of supply/work order within the specified period;
- c) when we fail to commence the supply of the goods or service or execute work as per supply/work order within the time specified;
- d) when we do not deposit the performance security within specified period after the supply/work Order is placed; and
- e) if we breach any provision of code of integrity prescribed for bidding specified in the Act and Chapter VI of these rules.

In addition to above, the State Government shall debar us from participating in any procurement process undertaken for a period not exceeding three years in case where the entire bid security or any part thereof is required to be forfeited by procuring entity.

We understand this Bid Securing Declaration shall expire if

- (i) we are not the successful Bidder;
- (ii) the execution of agreement for procurement and performance security is furnished by us in case we are successful bidder;
- (iii) thirty days after the expiration of our Bid;
- (iv) the cancellation of the procurement process; or
- (v) the withdrawal of bid prior to the deadline for presenting bids, unless the bidding documents stipulate that no such withdrawal is permitted.

Signed :
Name.....
In the capacity of
Duly authorized to sign the bid for and on behalf of

A